inhoudsopgave

bladnr.	inhoud:	laatste datum:
blad 00	voorblad	20-07-2023
blad 01	Fascia LED 600mm	20-07-2023
blad 02	Wall logo arch "M"	20-07-2023
blad 03	Panel LED arch "M"	20-07-2023
blad 04	McCafé LED 1500mm	15-12-2023
blad 05	DT-1 = Drive Totem 1 - 6,5m	20-07-2023
blad 06	DT-1 = Drive Totem 1 - 6,5m	20-07-2023
blad 07	DS-A = Directional Sign - welkom	20-07-2023
blad 08	DS-A = Directional Sign - welkom	20-07-2023
blad 09	DS-A = Directional Sign - tot ziens	20-07-2023
blad 10	DS-A = Directional Sign - tot ziens	20-07-2023
blad 11	DS-A = Directional Sign - McDrive	20-07-2023
blad 12	DS-A = Directional Sign - McDrive	20-07-2023
blad 13	GS-1 = Gateway Sign	20-07-2023
blad 14	GS-1 = Gateway Sign	20-07-2023
blad 15	COD Canopy+ praatpaal	20-07-2023
blad 16	COD Canopy+ praatpaal	20-07-2023
blad 17	COD = praatpaal	20-07-2023
blad 18	foto DTC + COD + DPS + DMB	20-07-2023
blad 19	DPS + DMB	20-07-2023
blad 20	DPS + DMB	20-07-2023
blad 21	PB = prullenbak	20-07-2023
blad 22	PB = prullenbak	20-07-2023
blad 23	fietsnietjes / fietsaanleunbeugels	20-07-2023
blad 24	terrasafscheiding laag hekwerk met optie verlichting	15-12-2023
blad 25	terrasafscheiding windscherm met optie verlichting	20-07-2023
blad 26	terrasafscheidingen + opties verlichting en Moshi paal	20-07-2023
blad 27	meubilair terras	20-07-2023
blad 28	vlaggenmast	20-07-2023
blad 29	straatlantaarn Moshipaal 5 meter	20-07-2023

DE BONT GROEP

St. Ignatiusstraat 255, 4817 KK Breda
Postbus 9306, 4801 LH Breda

tel. +31 (0) 76 522 9009

info@debontgroep.nl
www.debontgroep.nl

opdrachtgever

McDonald's Nederland B.V.
postbus 403, 3500 AK te Utrecht

project

Nieuwbouw McDonald's restaurant + McDrive
aan de Zuivering te Vriezenveen

onderwerp

terreinobjecten + signage


formaat	getekend	datum	projectnummer
A3	AvB	20-07-2023	22247S
schaal	type	status	tekeningnummer
n.v.t.	T-595	definitief	B-06
fase	store nr.	gewijzigd	
bouwaanvraag	22028	A: 15-12-2023	

22247S_B-06_signage_Vriezenveen.dwg

124-913-001 - McD Fascia 600 mm LED - green Substructure

124-914-001 - McD Fascia 600 mm LED - brown Substructure



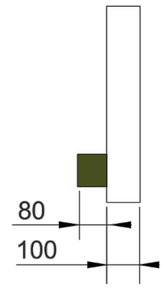

Dimensions: 4920 x 600 x 180 mm

Design:

2 mm Aluminium-backplate glued with 10 mm Foamex plate. LED modules installed on the Foamex plate. Cover made of 3mm white acryllic glass, case opaque, front of the letters translucent. Cover fixed with screws on the Foamex plate. Single letters are mounted on a substructure made of welded aluminium profiles, coated in dark green - Akzo Nobel MK 120 or brown - RAL 8003.

Illumination:

Internal illumination with 12V LED.

Technical Information:

Nominal Voltage:	230V
Frequency:	50-60 Hz
Connected Load:	132 W
Connecting Cable:	3 x 1,5 mm²
Fuse Protection:	C16 A

Installation:


Roof mounted on a Substructure (to be ordered seperately). The substructure has to be installed in advance, roof needs to be sealed by a qualified person after installation of the substructure. Once connected an fitted the sign should be tested for functionality.

The Sign conforms with the following guidelines:

VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2

CE conform according to guidelines:

89/336/EWG, 92/31/EWG, 73/23/EWG

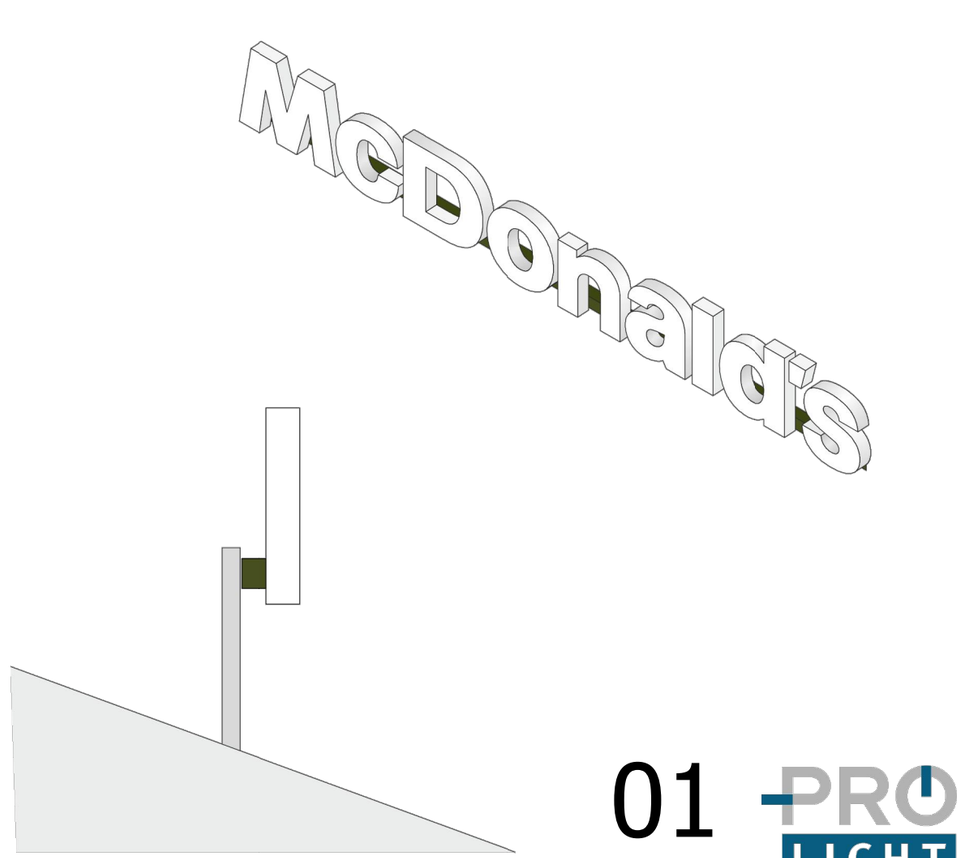

124-365-001 - Wall-Logo Height 450 mm	**WxHxD - 514 x 450 x 120**
124-366-001 - Wall-Logo Heighte 565 mm	**WxHxD - 646 x 565 x 120**
124-367-001 - Wall-Logo Height 707 mm	**WxHxD - 808 x 707 x 120**
124-403-001 - Wall-Logo Height 900 mm	**WxHxD - 1029 x 900 x 120**
124-368-001 - Wall-Logo Height 1220 mm	**WxHxD - 1394 x 1220 x 120**
124-369-001 - Wall-Logo Height 1395 mm	**WxHxD - 1594 x 1395 x 120**
124-370-001 - Wall-Logo Height 2200 mm	**WxHxD - 2514 x 2200 x 180**
124-371-001 - Wall-Logo Height 2960 mm	**WxHxD - 3383 x 2960 x 180**

Dimensions:
see schedule above

Design:
2 mm Aluminium-backplate glued with 10 mm Foamex plate. LED modules installed on the Foamex plate. Letter Casing made of formed and welded Aluminium, Trim yellow coated extruded PVC, Letter Cover 3 mm yellow, flat acryllic glass.

Illumination:
Internal illumination with LED.

Illuminants:


Logo 450:	12 V LED
Logo 565:	12 V LED
Logo 707:	12 V LED
Logo 900:	12 V LED
Logo 1395:	12 V LED
Logo 2200:	12 V LED
Logo 2960:	12 V LED

Connected load:

6,5 W
8,2 W
9,6 W
20 W
25,5 W
68 W
124 W

Technical Information:

Nominal Voltage:	230V
Frequency:	50-60 Hz
Connecting Cable:	3 x 1,5 mm²
Fuse Protection:	C16 A

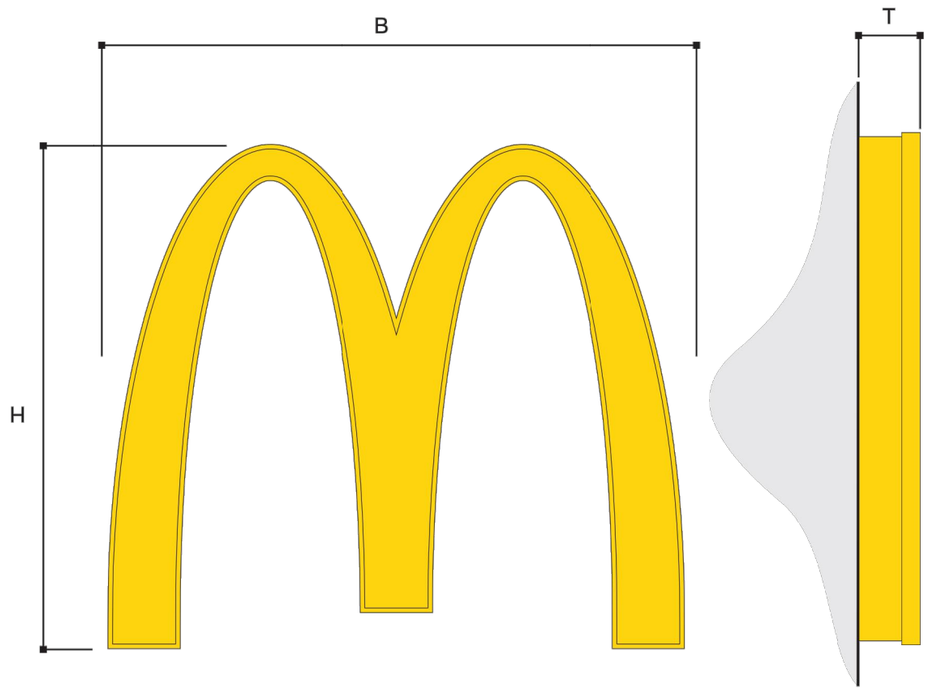


Installation:
Wall Installation with plugs and screws. The sign is internally cabled and requires on-Site connection to existing Power Supply Cable. Once connected an fitted the sign should be tested for functionality. Sign can also be installed on the roof with a substructure, which has to be ordered seperately.


The Sign conforms with the following guidelines:
VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2


CE conform according to guidelines:
89/336/EWG, 92/31/EWG, 73/23/EWG


Status: January 2011


© by Prolicht 2011

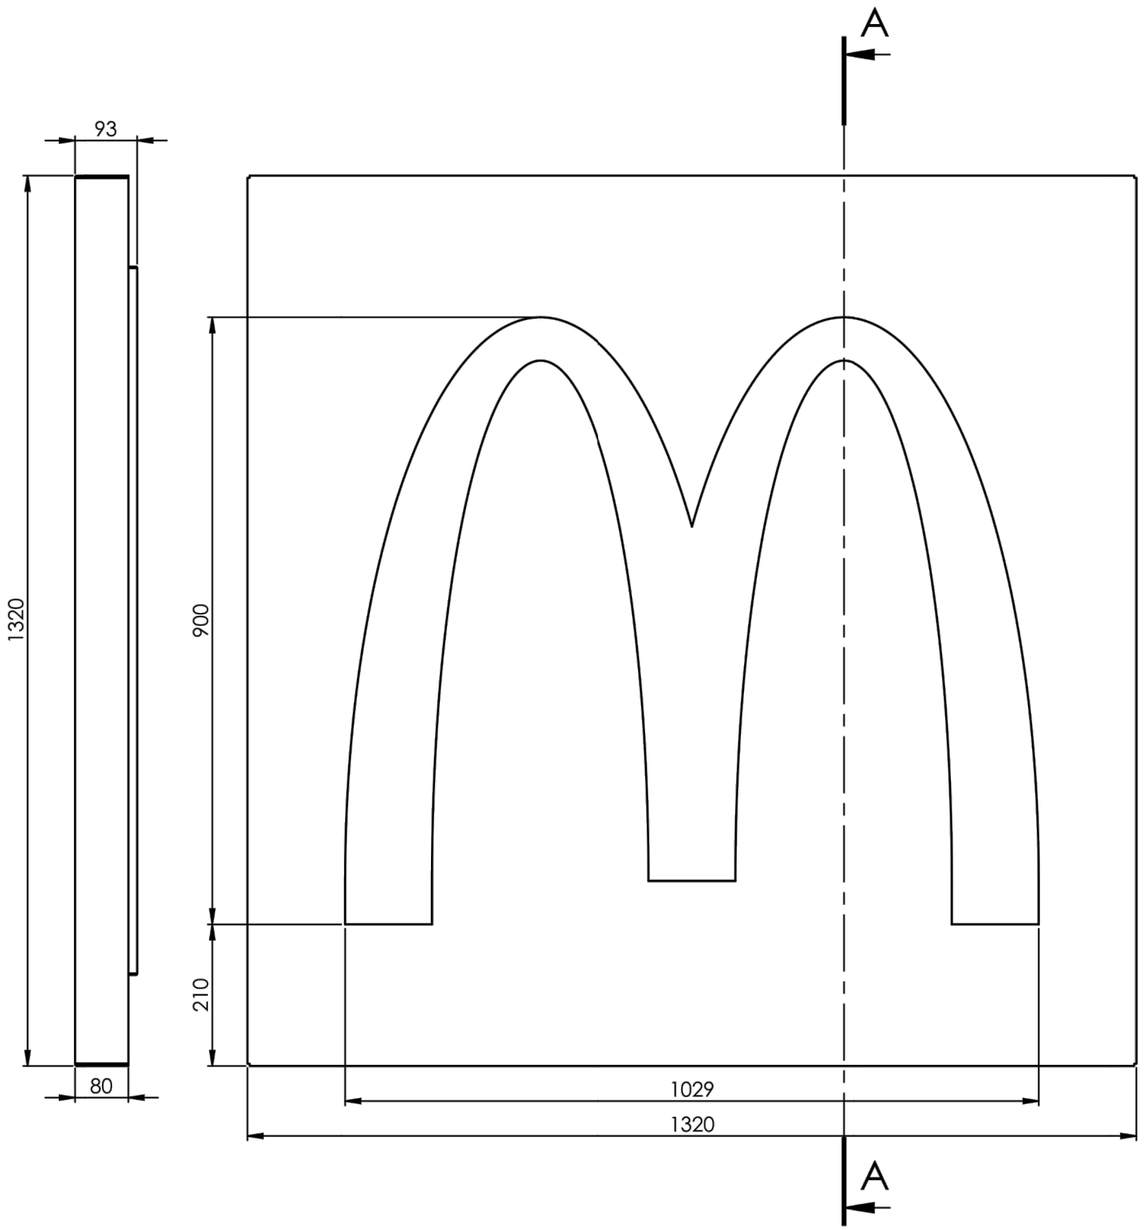

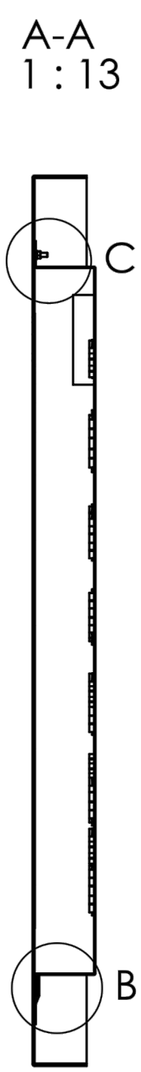

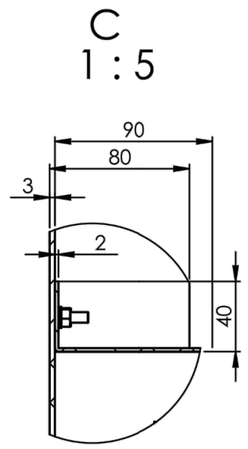

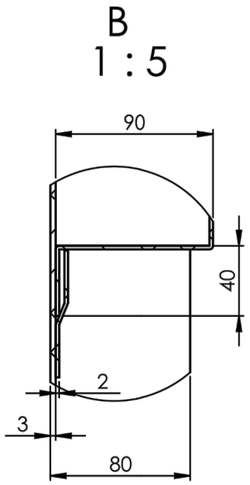

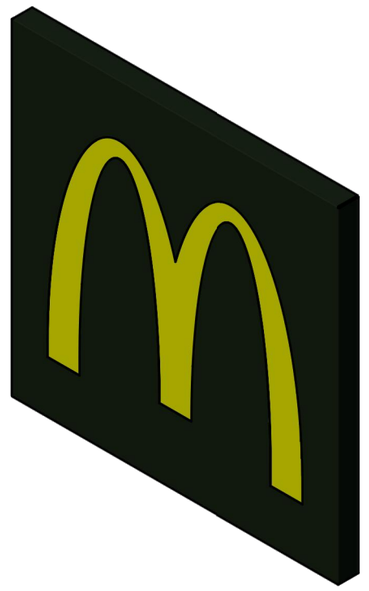


03

Tolerancje ogólne General tolerances EN 22768-1/m		Skala Scale 1:20	MC DONALDS	kg Masa/Weight
A4	Data Date	Nazwisko Name	PANEL M-LOGO FÜR WHITE CAP 1320X1320 MM NEUE AUSFÜHRUNG	
Rysował Drawn	2013-05-16	D.Rudner		
Sprawdził Checked	2013-05-16	G.Zwolak		
Zatwierdził Approved	2013-05-16	G.Zwolak		
PRO LICHT			024 554 600	
			Nr rysunku/Article No	Rewizja Revision:
			Zapisany jako/Save as: 024 554 600.SLDDRW	Stan wykończenia/Finished condition

124-902-001 Artikelnummer mit brauner UK

124-901-001 Artikelnummer mit grüner UK

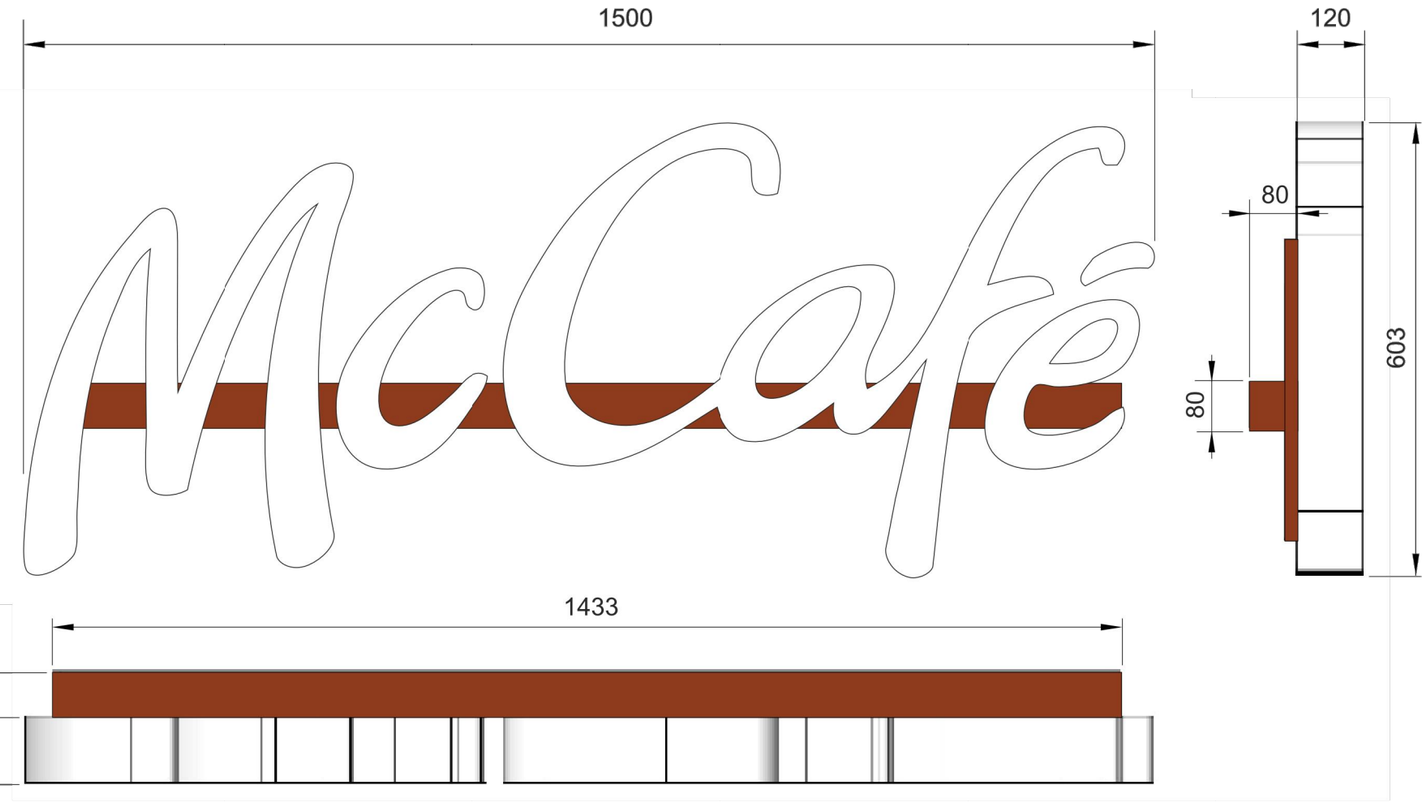

Maße: 1500 x 603 x 200 mm

Buchstabenkörper:

Ausführung in Profil 8. Zarge aus thermisch verformtem weißen Acryl (3mm) - mit 3mm Acryl-Spiegel verklebt.
Rückwand aus Aluminiumblech (2 mm) mit aufgeklebter PVC-Platte (10 mm) als Trägerelement für die LED-Module.
PVC-Platte ist umlaufend 3 mm kleiner als die Aluminium-Trägerplatte.
Die Acrylzarge wird durch seitliche Verschraubungen in der PVC-Platte mit der Rückwand verbunden.

Tragkonstruktion:

Aluminium-QR 80 x 80 mm - mit Vertikal-Stützen 20 x 20 mm gemäß RAL 8003 oder dunkelgrün - Akzo Nobel MK 120 pulverbeschichtet.

Ausleuchtung und LED-Wechsel:


LED mit elektronischen Vorschaltgeräten.
LED-Wechsel beim Logo durch Abnehmen der Buchstabenkörper

Technische Daten:

Netzspannung:	230V
Frequenz:	0/50-60 Hz
Anschlußleitung:	3x 1,5 mm
Absicherung:	C16 A
Gesamtleistung:	53 W

Das Element stimmt mit den Vorschriften folgender Richtlinien überein:
VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2

CE-konform nach folgenden Richtlinien:
89/336/EWG, 92/31/EWG, 73/23/EWGG

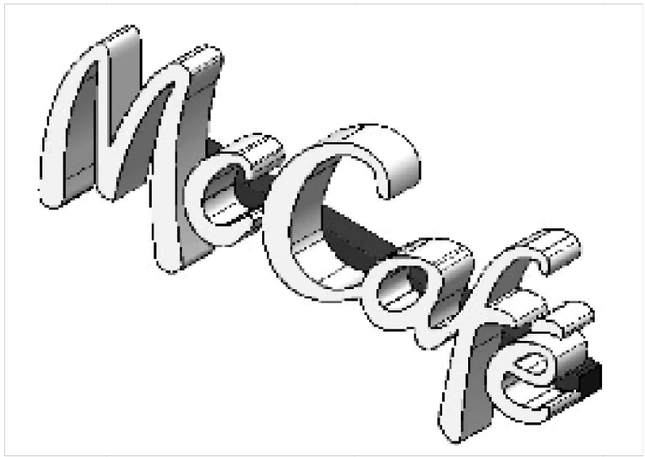


5 Drive Totem 1 - 6,5 m

McDonald's

124-414-001 Drive Totem 1 - 6,5 m VERSION A

124-000-001 Drive Totem 1 - 6,5 m VERSION B

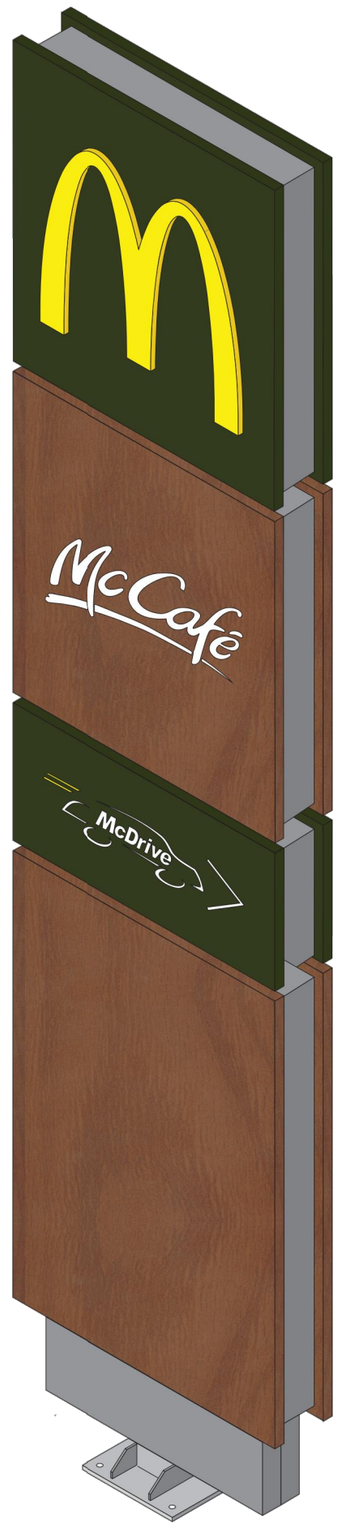

Dimensions:

(WxHxD) 1450 x 6500 x 320 mm

Design:

Galvanized steel-construction, Cover made of 3 mm Reynobond "Italian Walnut" (McCafé-elment & blank element), other elements coated in dark green - Akzo Nobel MK 120 (M & Mcdrive). M cut out- yellow acryllic glass pushed through, McCafé and McDrive cut out and back-layed with acryllic glass. Side faces coated in in RAL 7022. Plinth made of Aluminium, coated in in RAL 7022. Element "McDrive" is rotatable.

Illumination:

Internal illumination with LED.

Technical Information:

Nominal Voltage:	230V
Frequency:	50-60 Hz
Connected Load:	250 W
Connecting Cable:	3 x 1,5 mm^2
Fuse Protection:	C16 A

Installation:

Free-standing Installation with fixing bolts in existing foundation. Bolts according to DIN norm.
When using Fixing Bolts ensure that the concrete has hardened sufficiently in accordance with specified requirements of the Bolt. Once connected an fitted the sign should be tested for functionality.

Foundation/Fixing Material:

1600 x 1600 x 900 mm - Concrete C 25/30 / Fixing Bolts


The Sign conforms with the following guidelines:


VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2


CE conform according to guidelines:


89/336/EWG, 92/31/EWG, 73/23/EWG


© by Prolicht 2011

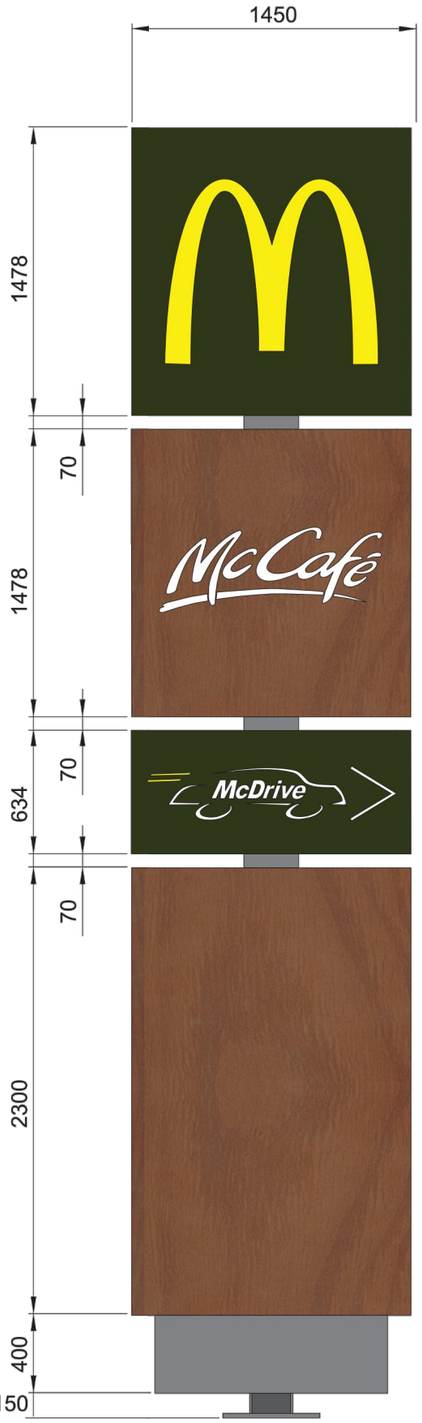

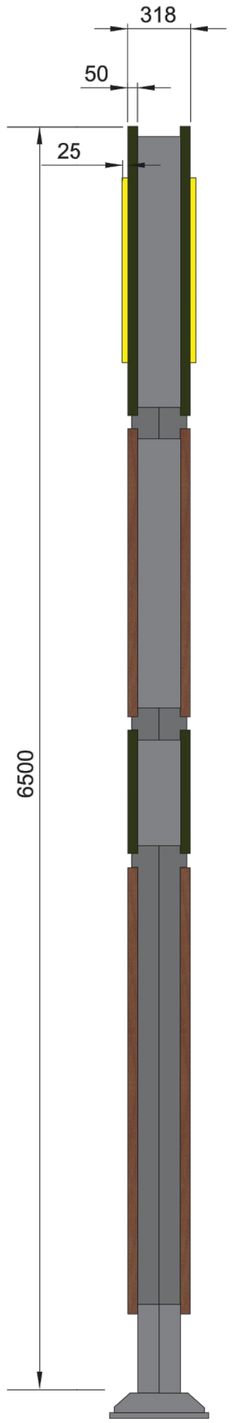

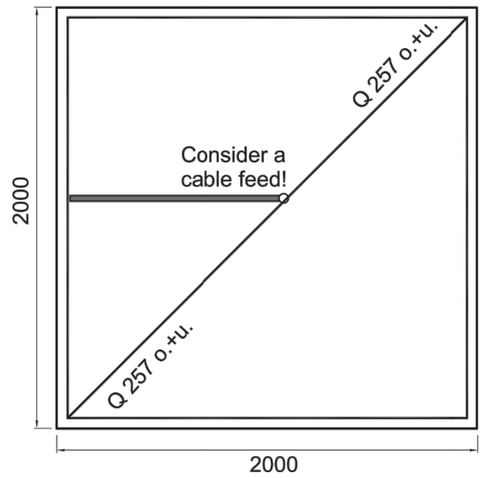

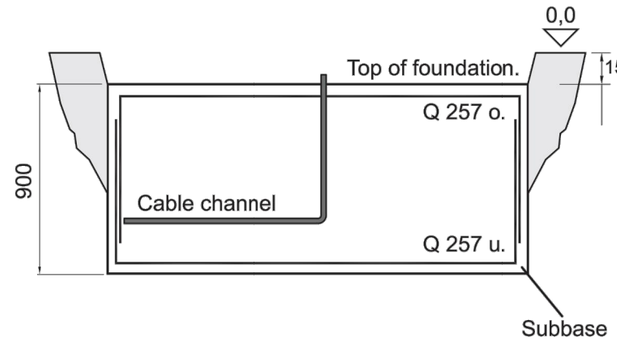

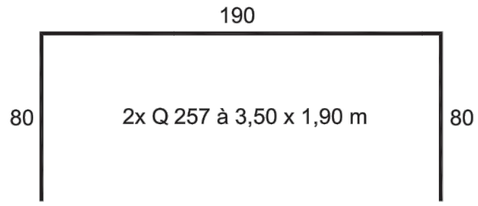

A geotechnical survey should be done to confirm conditions for the Foundation.

Individual Foundation drawings are available upon request.
Local conditions and requirements should be observed and adhered to at all times.
Foundations should only be planned and cast by suitably qualified persons.
Lightning strike protection should be installed as per the local legal requirements.

© by Prolicht 2011

124-441-001 Directional Sign - Einfahrt

Dimensions:
(WxHxD) 600 x 2100 x 120 mm

Design:
Galvanized steel-construction, aluminium cover coated in dark green- Akzo Nobel MK 120. Illuminated text/arrow cut out an back-layed with white acryllic glass. Upper white element made of white acryllic glass - illuminated. Plinth made of Aluminium, coated in in grey - RAL 7022.

Illumination:
Internal illumination with LED.

Technical Information:
Nominal Voltage:	230V
Frequency:	50-60 Hz
Connected Load:	41 W
Connecting Cable:	3 x 1,5 mm^2
Fuse Protection:	C16 A

Installation:
Free-standing Installation with fixing bolts in existing foundation. Bolts according to DIN norm. When using Fixing Bolts ensure that the concrete has hardened sufficiently in accordance with specified requirements of the Bolt. Once connected an fitted the sign should be tested for functionality.

Foundation/Fixing Material:
800 x 800 x 1000 mm - Concrete C 25/30 / Fixing Bolts


The Sign conforms with the following guidelines:
VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2


CE conform according to guidelines:
89/336/EWG, 92/31/EWG, 73/23/EWG





Status: January 2011


© by Prolicht 2011

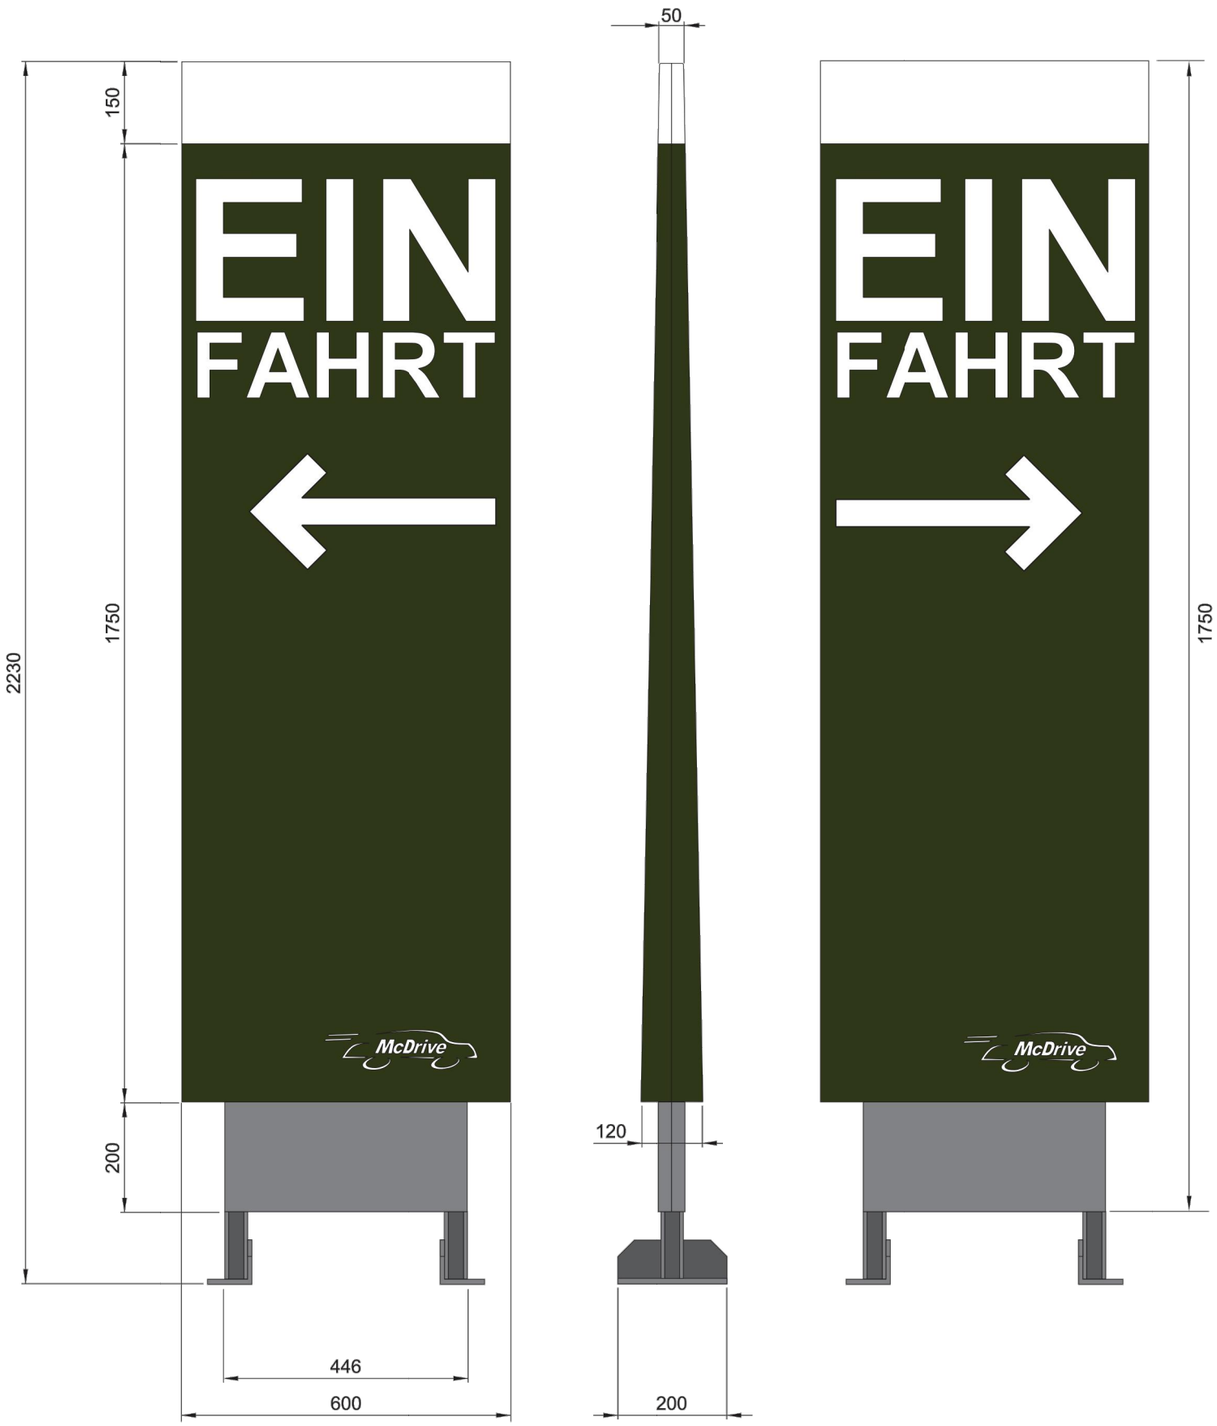

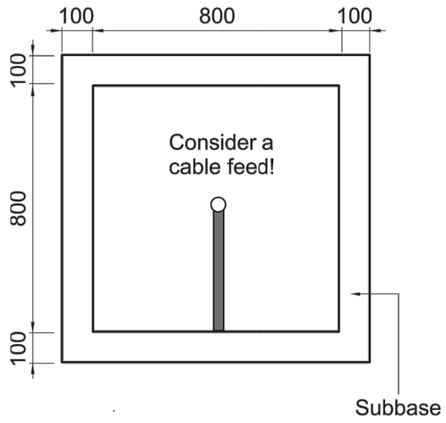

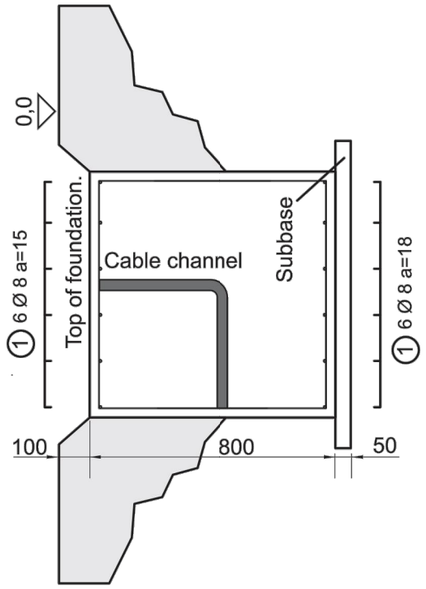

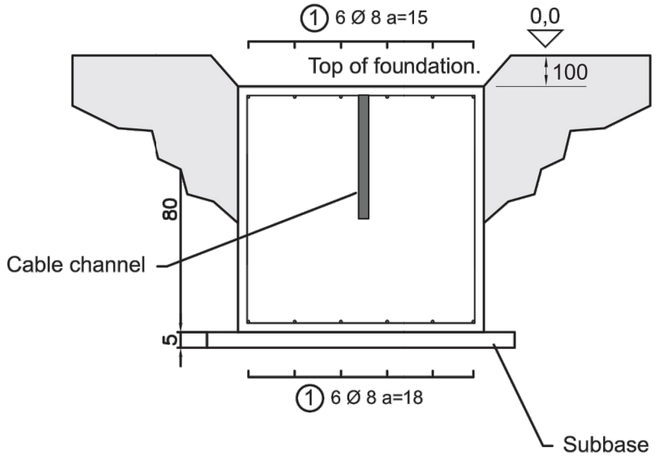

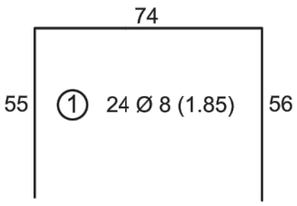

A geotechnical survey should be done to confirm conditions for the Foundation.

Individual Foundation drawings are available upon request.
Local conditions and requirements should be observed and adhered to at all times.
Foundations should only be planned and cast by suitably qualified persons.
Lightning strike protection should be installed as per the local legal requirements.

Status: January 2011

© by Prolicht 2011

124-444-001 Directional Sign - Ausfahrt

Dimensions:
(WxHxD) 600 x 2100 x 120 mm

Design:
Galvanized steel-construction, aluminium cover coated in dark green- Akzo Nobel MK 120. Illuminated text/arrow cut out an back-layed with white acryllic glass. Upper white element made of white acryllic glass - illuminated. Plinth made of Aluminium, coated in in grey - RAL 7022.

Illumination:
Internal illumination with LED.


Technical Information:
Nominal Voltage:	230V
Frequency:	50-60 Hz
Connected Load:	41 W
Connecting Cable:	3 x 1,5 mm^2
Fuse Protection:	C16 A

Installation:
Free-standing Installation with fixing bolts in existing foundation. Bolts according to DIN norm. When using Fixing Bolts ensure that the concrete has hardened sufficiently in accordance with specified requirements of the Bolt. Once connected an fitted the sign should be tested for functionality.


Foundation/Fixing Material:
800 x 800 x 1000 mm - Concrete C 25/30 / Fixing Bolts


The Sign conforms with the following guidelines:
VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2


CE conform according to guidelines:
89/336/EWG, 92/31/EWG, 73/23/EWG

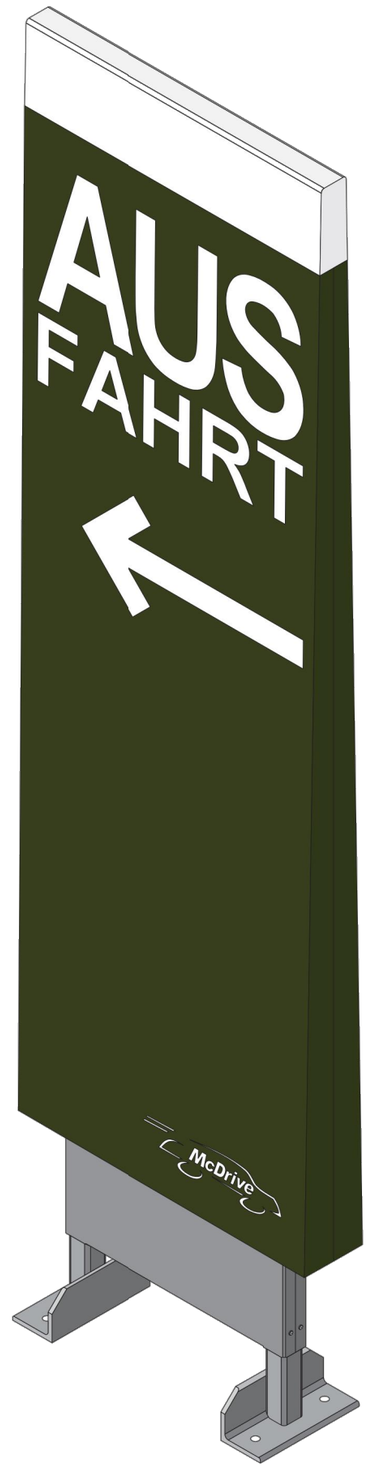



© by Prolicht 2011

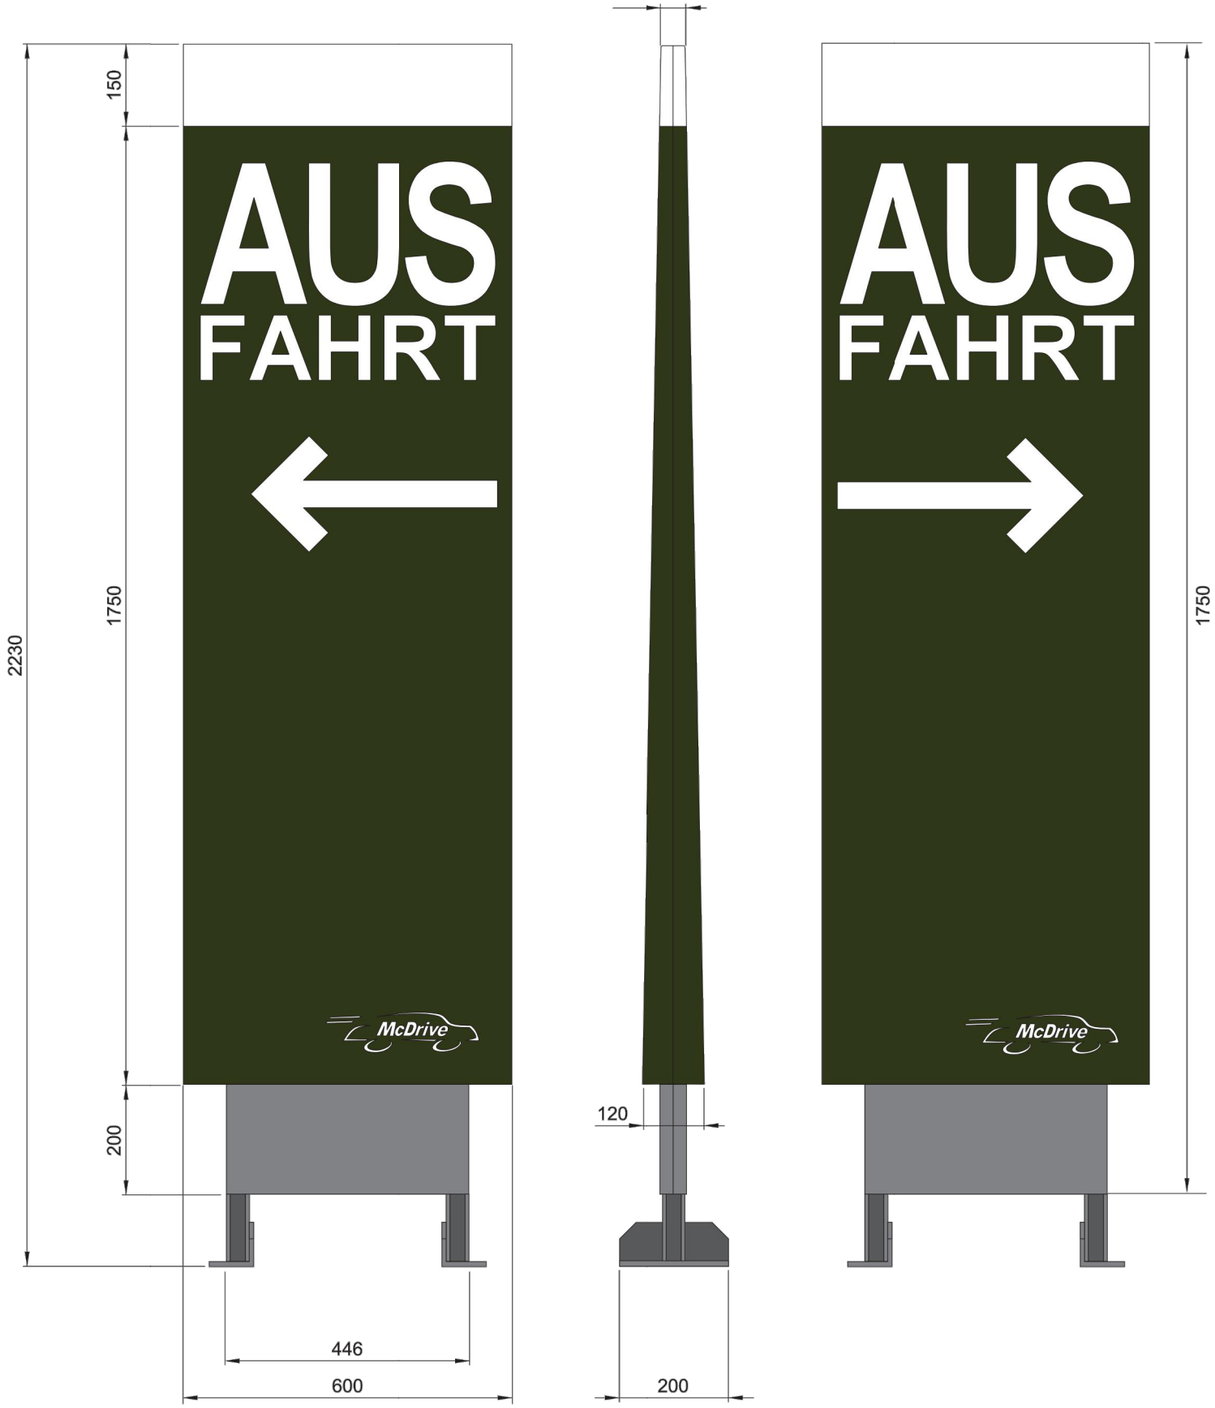

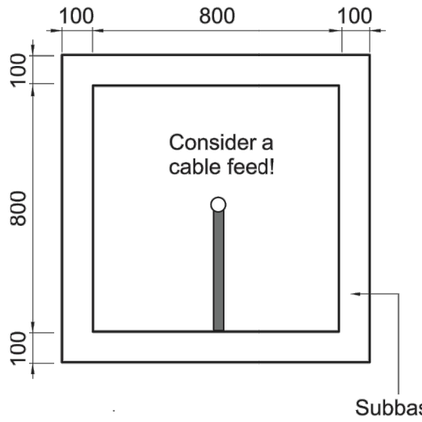

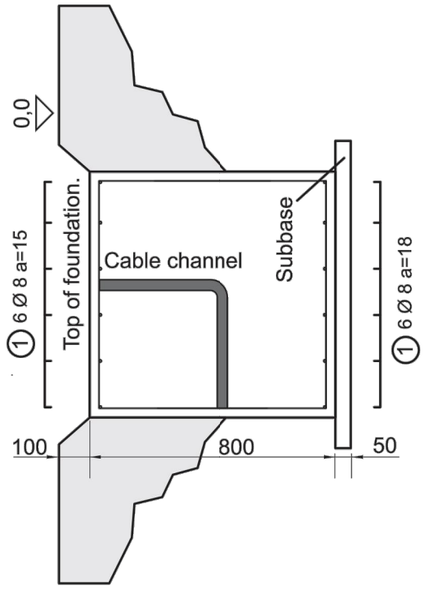

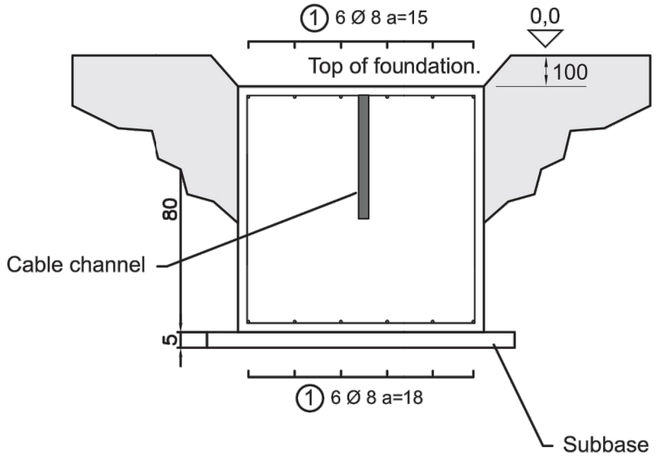

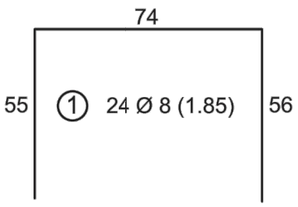

A geotechnical survey should be done to confirm conditions for the Foundation.

Individual Foundation drawings are available upon request.
Local conditions and requirements should be observed and adhered to at all times.
Foundations should only be planned and cast by suitably qualified persons.
Lightning strike protection should be installed as per the local legal requirements.

Status: January 2011

© by Prolicht 2011

124-438-001 Directional Sign - McDrive

Dimensions:
(WxHxD) 600 x 2100 x 120 mm

Design:
Galvanized steel-construction, aluminium cover coated in dark green- Akzo Nobel MK 120. Illuminated text/arrow cut out an back-layed with white acryllic glass. Upper white element made of white acryllic glass - illuminated. Plinth made of Aluminium, coated in in grey - RAL 7022.

Illumination:
Internal illumination with LED.


Technical Information:
Nominal Voltage:	230V
Frequency:	50-60 Hz
Connected Load:	41 W
Connecting Cable:	3 x 1,5 mm^2
Fuse Protection:	C16 A

Installation:
Free-standing Installation with fixing bolts in existing foundation. Bolts according to DIN norm. When using Fixing Bolts ensure that the concrete has hardened sufficiently in accordance with specified requirements of the Bolt. Once connected an fitted the sign should be tested for functionality.

Foundation/Fixing Material:
800 x 800 x 1000 mm - Concrete C 25/30 / Fixing Bolts

The Sign conforms with the following guidelines:
VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2


CE conform according to guidelines:
89/336/EWG, 92/31/EWG, 73/23/EWG

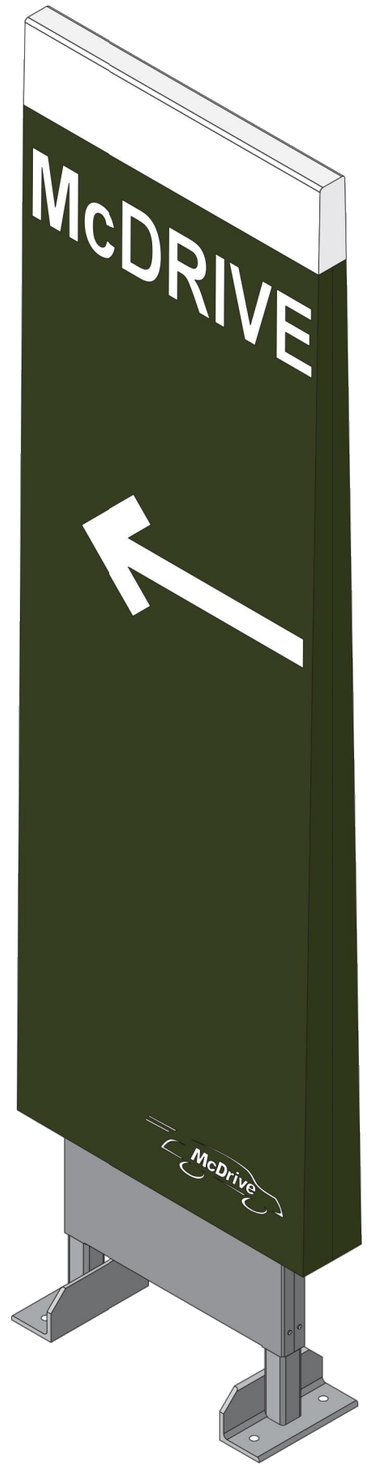



Status: January 2011


© by Prolicht 2011



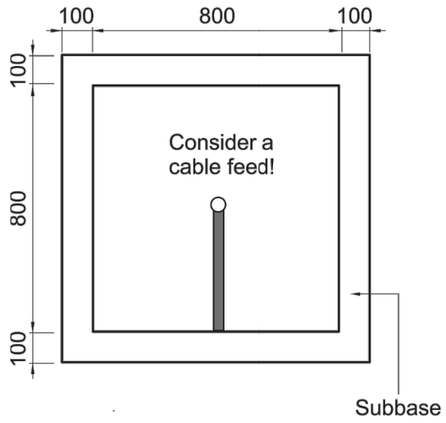

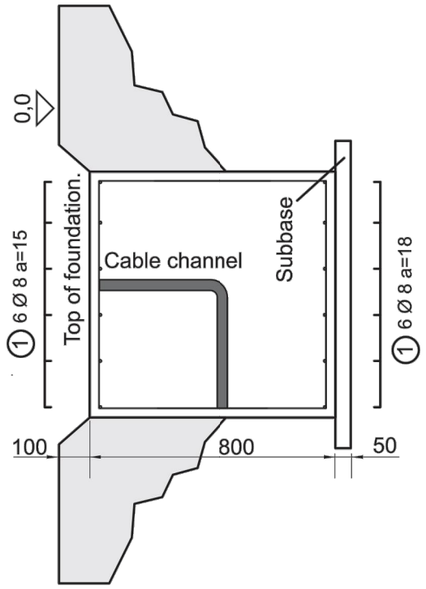

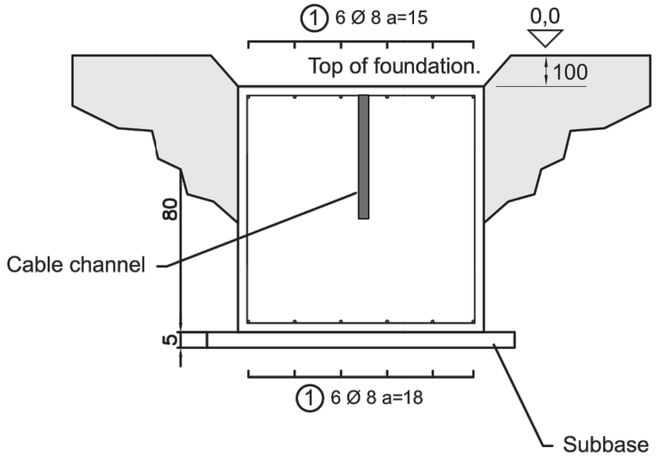

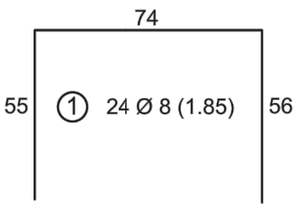

A geotechnical survey should be done to confirm conditions for the Foundation.

Individual Foundation drawings are available upon request.
Local conditions and requirements should be observed and adhered to at all times.
Foundations should only be planned and cast by suitably qualified persons.
Lightning strike protection should be installed as per the local legal requirements.

Status: January 2011

© by Prolicht 2011

Dimensions:
(WxHxD) 4250 x 3300 x 200 mm

Design:
Galvanized steel-construction, Cover made of 3 mm Reynobond "Italian Walnut", swingable arm made of galvanized steel-construction with Reynobond cover coated in dark green- Akzo Nobel MK 120. Stripes made of reflective vinyl with additional LED modules. Logos "McDrive" and "24" (optional!) cut out and back-layed with acryllic glass/illuminated. Credit card logos digital-print on dark green background. Plinth made of Aluminium, coated in in RAL 7022. If the boom is hit, an alarm will sound, and a red warning lamp will begin to flash (optional!).

Illumination:
Internal illumination with LED.

Illuminants:
Lightbox: 12 V LED

Technical Information:
Nominal Voltage:	230V
Frequency:	50-60 Hz
Connected Load:	40 W
Connecting Cable:	3 x 1,5 mm²
Fuse Protection:	C16 A

Installation:
Free-standing Installation with fixing bolts in existing foundation. Bolts according to DIN norm. When using Fixing Bolts ensure that the concrete has hardened sufficiently in accordance with specified requirements of the Bolt. Once connected an fitted the sign should be tested for functionality.


Foundation/Fixing Material:
1300 x 1300 x 1000 mm - Concrete C 25/30 / Fixing Bolts

The Sign conforms with the following guidelines:
VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2

CE conform according to guidelines:
89/336/EWG, 92/31/EWG, 73/23/EWG

Status: January 2011


OPTIONAL:
- 24 Stunden-Logo illuminated
- Signal horn
- Signal lamp

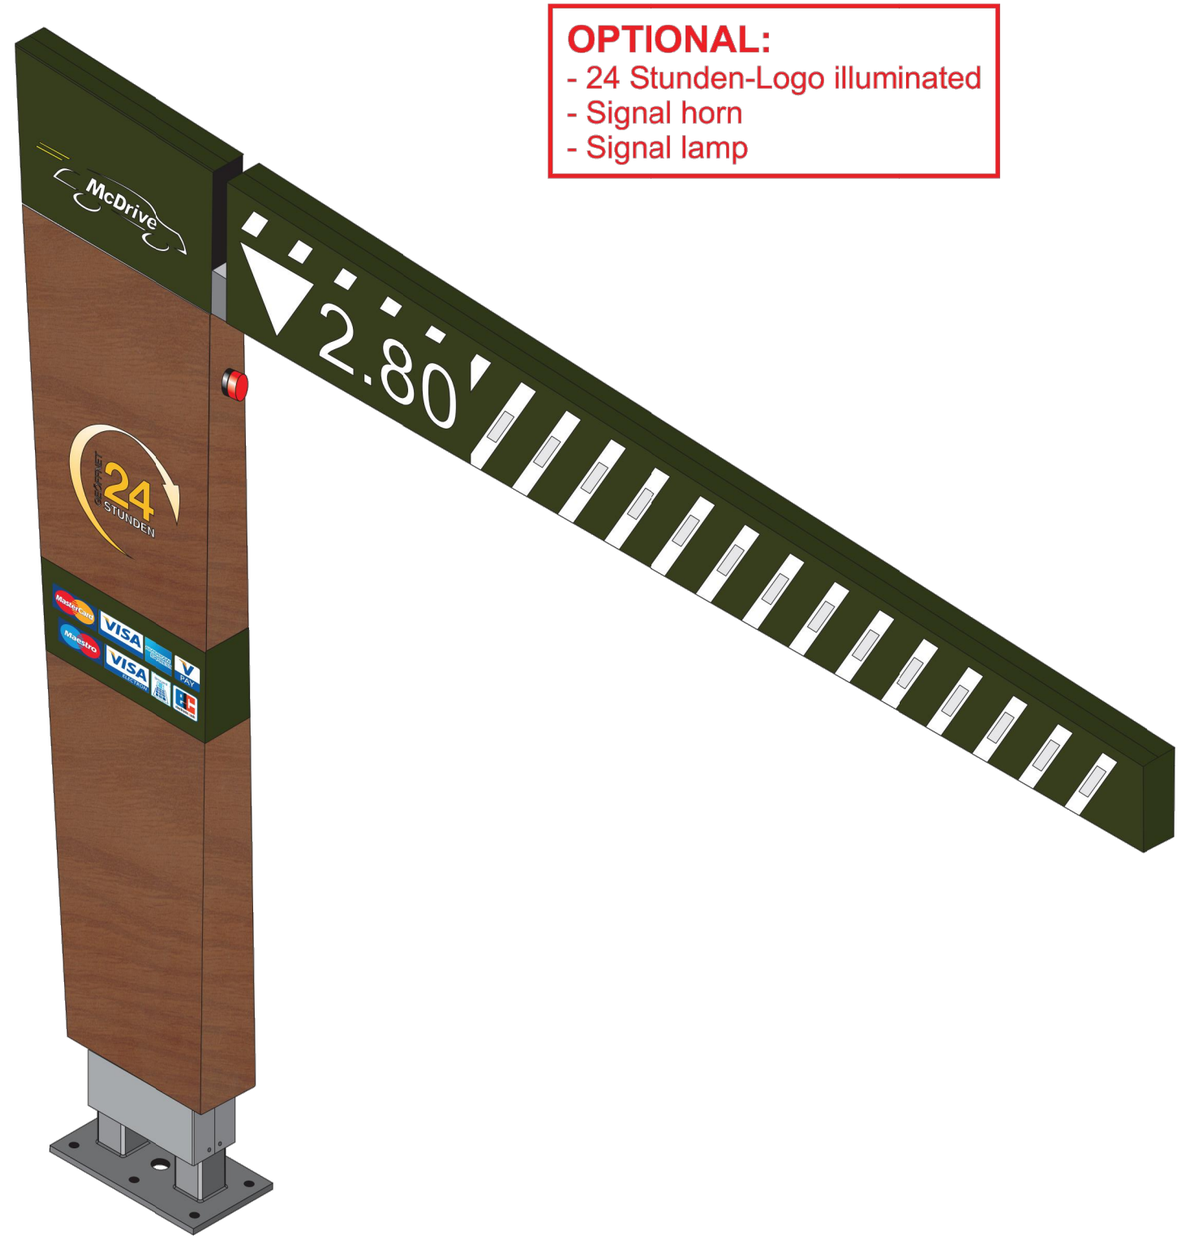



© by Prolicht 2011


McDonald's

124-427-001 Gateway Sign 1 - right

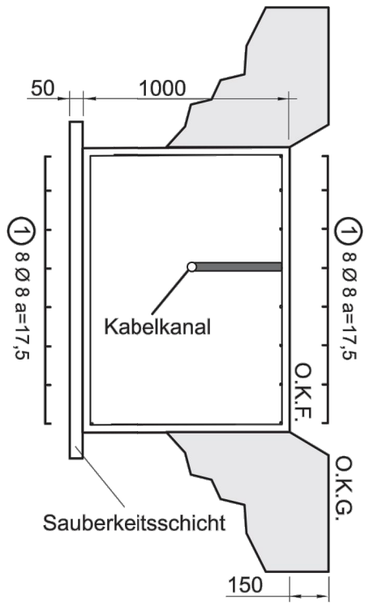

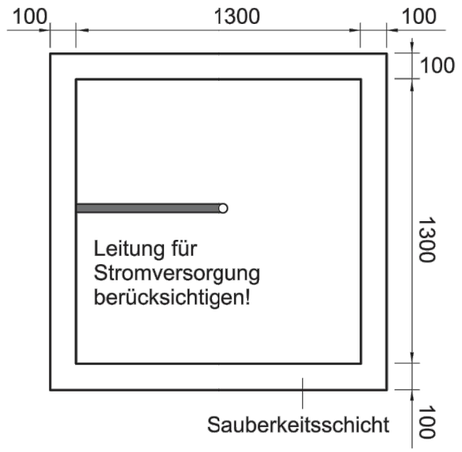

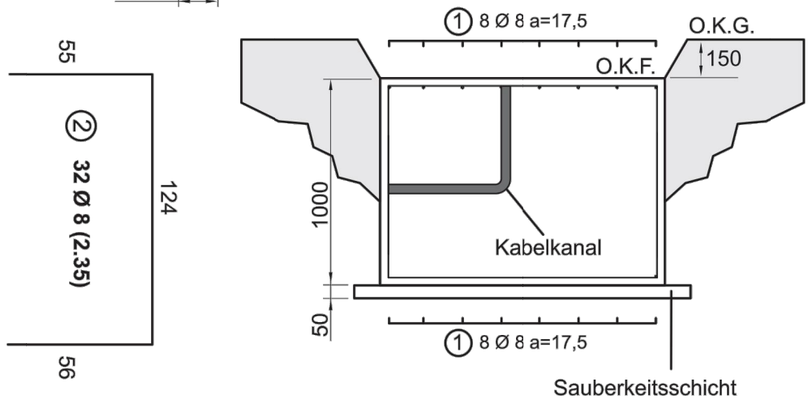

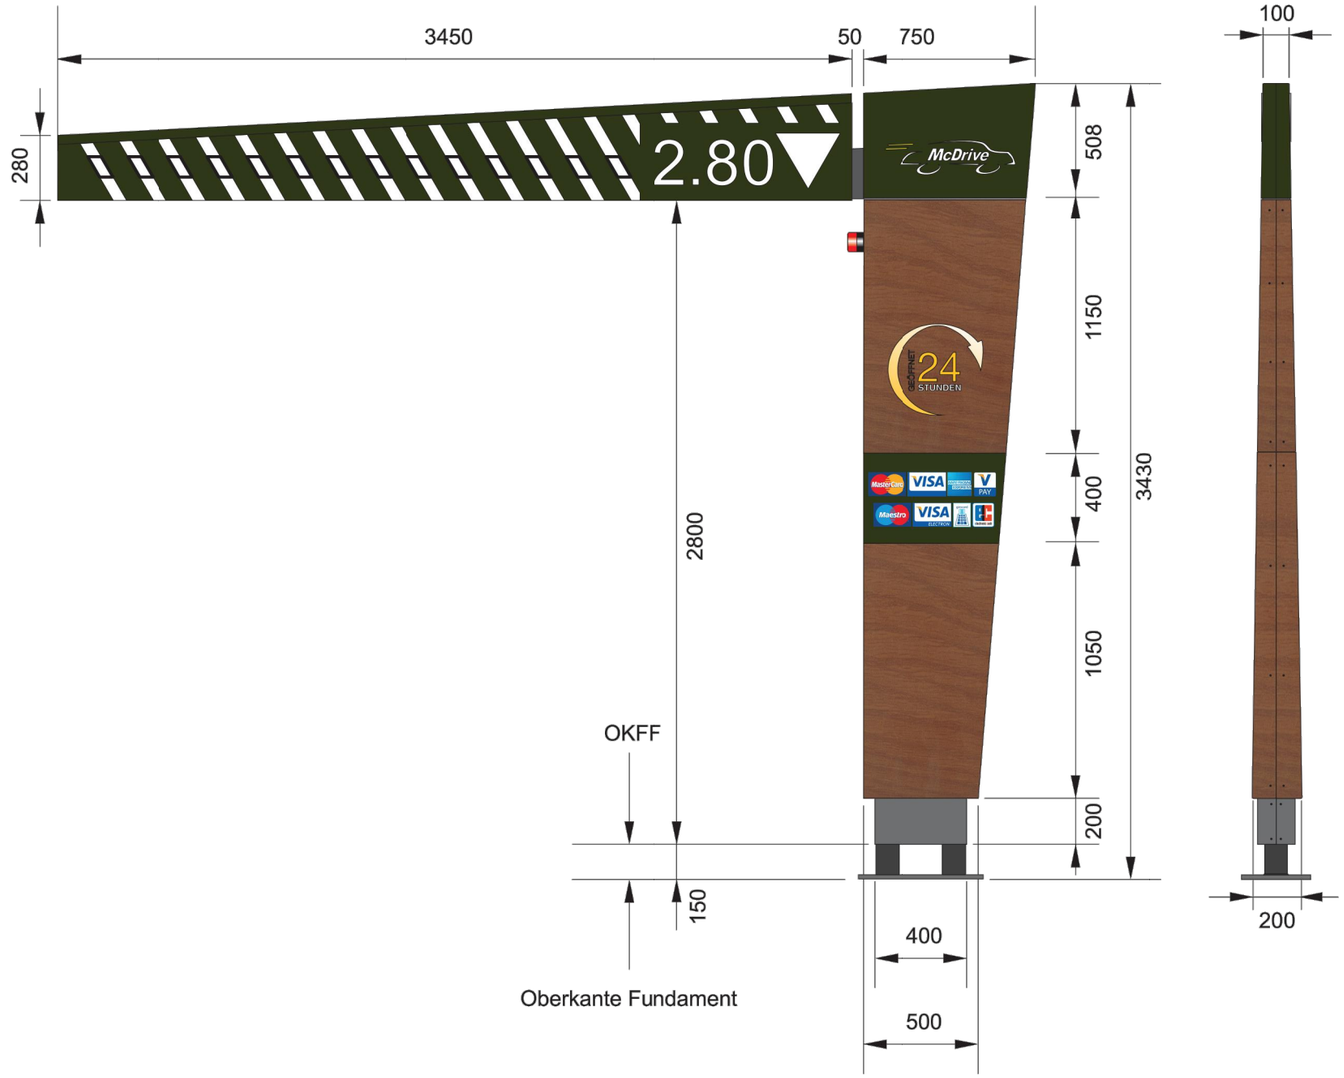

A geotechnical survey should be done to confirm conditions for the Foundation.

Individual Foundation drawings are available upon request.
Local conditions and requirements should be observed and adhered to at all times.
Foundations should only be planned and cast by suitably qualified persons.
Lightning strike protection should be installed as per the local legal requirements.

Status: January 2011

© by Prolicht 2011

McDonald's

124-446-001 COD Canopy

Dimensions:
(WxHxD) Canopy: 2294 x 3525 x 200 mm
(WxHxD) Steel Frame: 800 x 2978 x 500 mm

Design:
Galvanized steel-construction coated in RAL 7022 - grey, case for COD coated in RAL 7022 - grey. Roof made of GRP, coated in white - RAL 9010. Triangle made of red, translucent acryllic glass with white opaque vinyl. Plinth made of Aluminium, coated in in RAL 7022. Additional LED modules for the illumination of the COD are installed under the canopy.

Illumination:
Internal illumination with LED.

Technical Information:
Nominal Voltage: 230V
Frequency: 50-60 Hz
Connected Load: 69 W
Connecting Cable: 3 x 1,5 mm^2
Fuse Protection: C16 A

Installation:
Free-standing Installation with fixing bolts in existing foundation. Bolts according to DIN norm. When using Fixing Bolts ensure that the concrete has hardened sufficiently in accordance with specified requirements of the Bolt. Once connected an fitted the sign should be tested for functionality.

Foundation/Fixing Material:
1200 x 1200 x 1000 mm - Concrete C 25/30 / Fixing Bolts


The Sign conforms with the following guidelines:
VDE 0100, VDE 0128, VDE 0711, EN 55015, EN 60598, EN 50107, EN 61547, EN 6100-3-2


CE conform according to guidelines:
89/336/EWG, 92/31/EWG, 73/23/EWG





PRO LICHT


© by Prolicht 2011

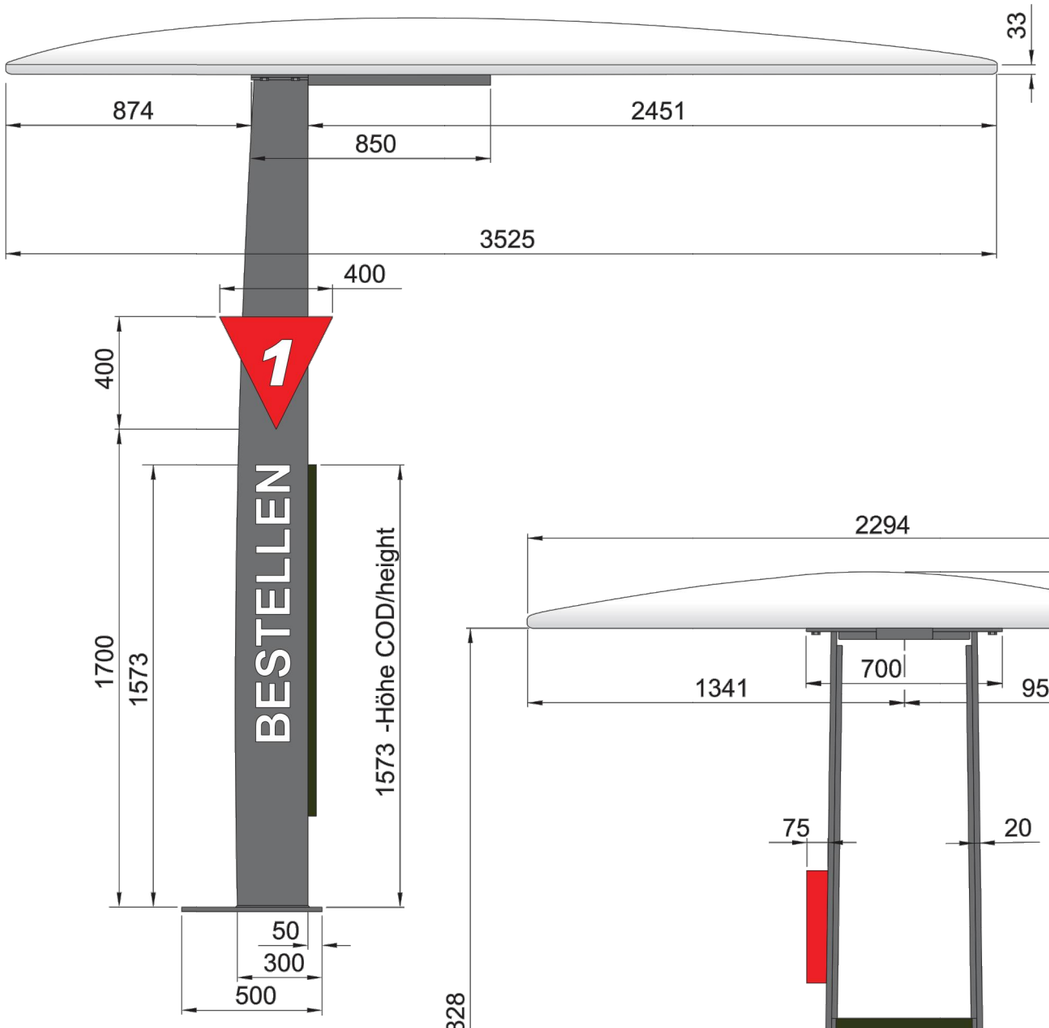


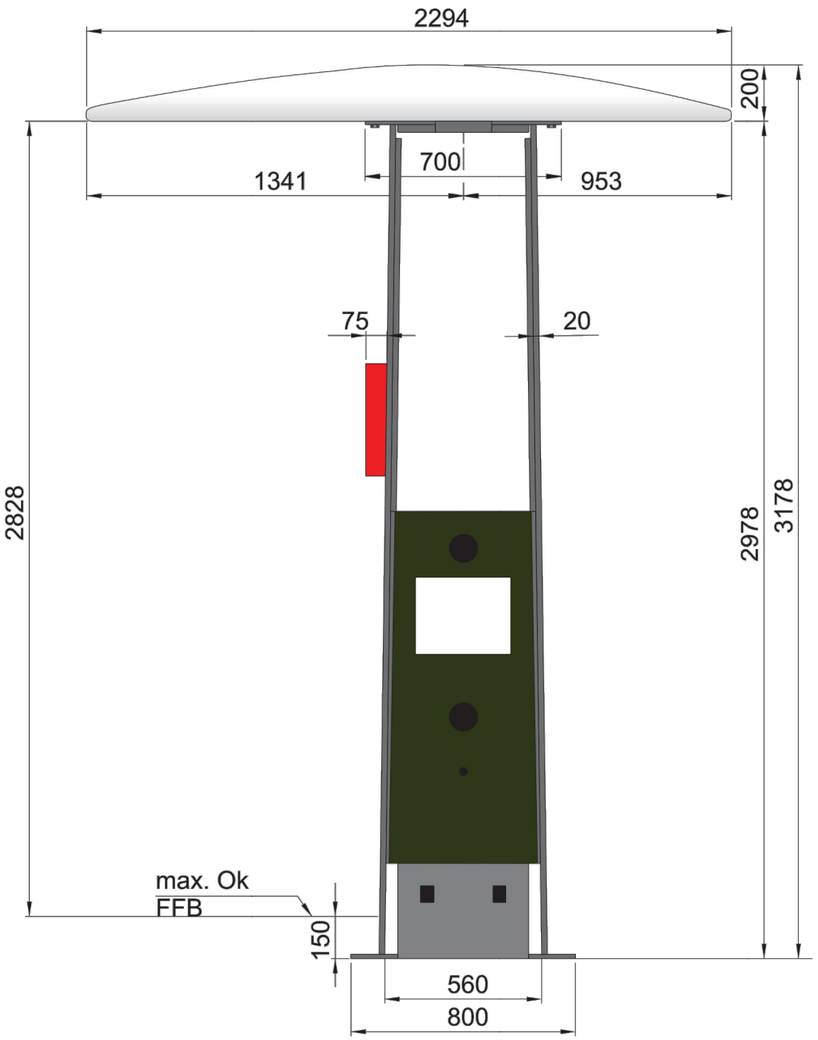


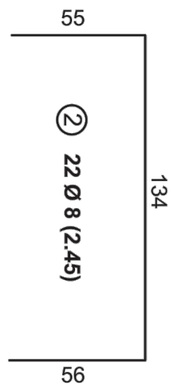

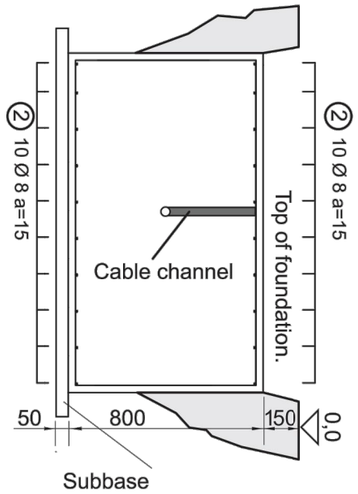

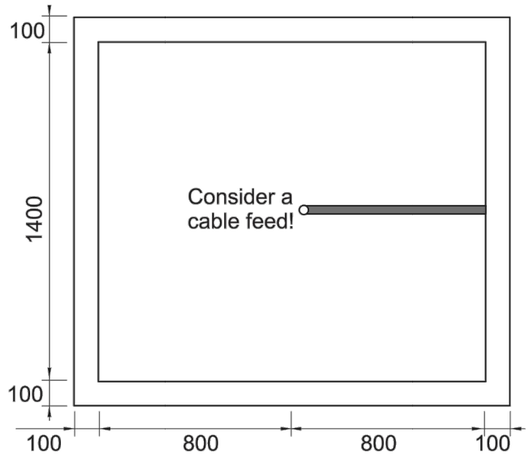

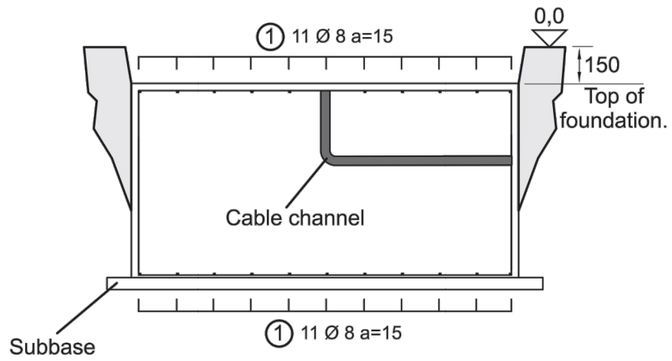

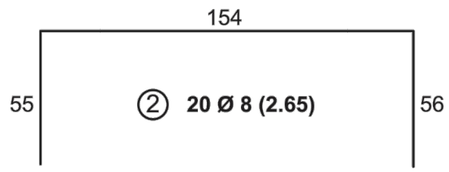


A geotechnical survey should be done to confirm conditions for the Foundation.

Individual Foundation drawings are available upon request.
Local conditions and requirements should be observed and adhered to at all times.
Foundations should only be planned and cast by suitably qualified persons.
Lightning strike protection should be installed as per the local legal requirements.

Status: January 2011


© by Prolicht 2011



ORDER HERE

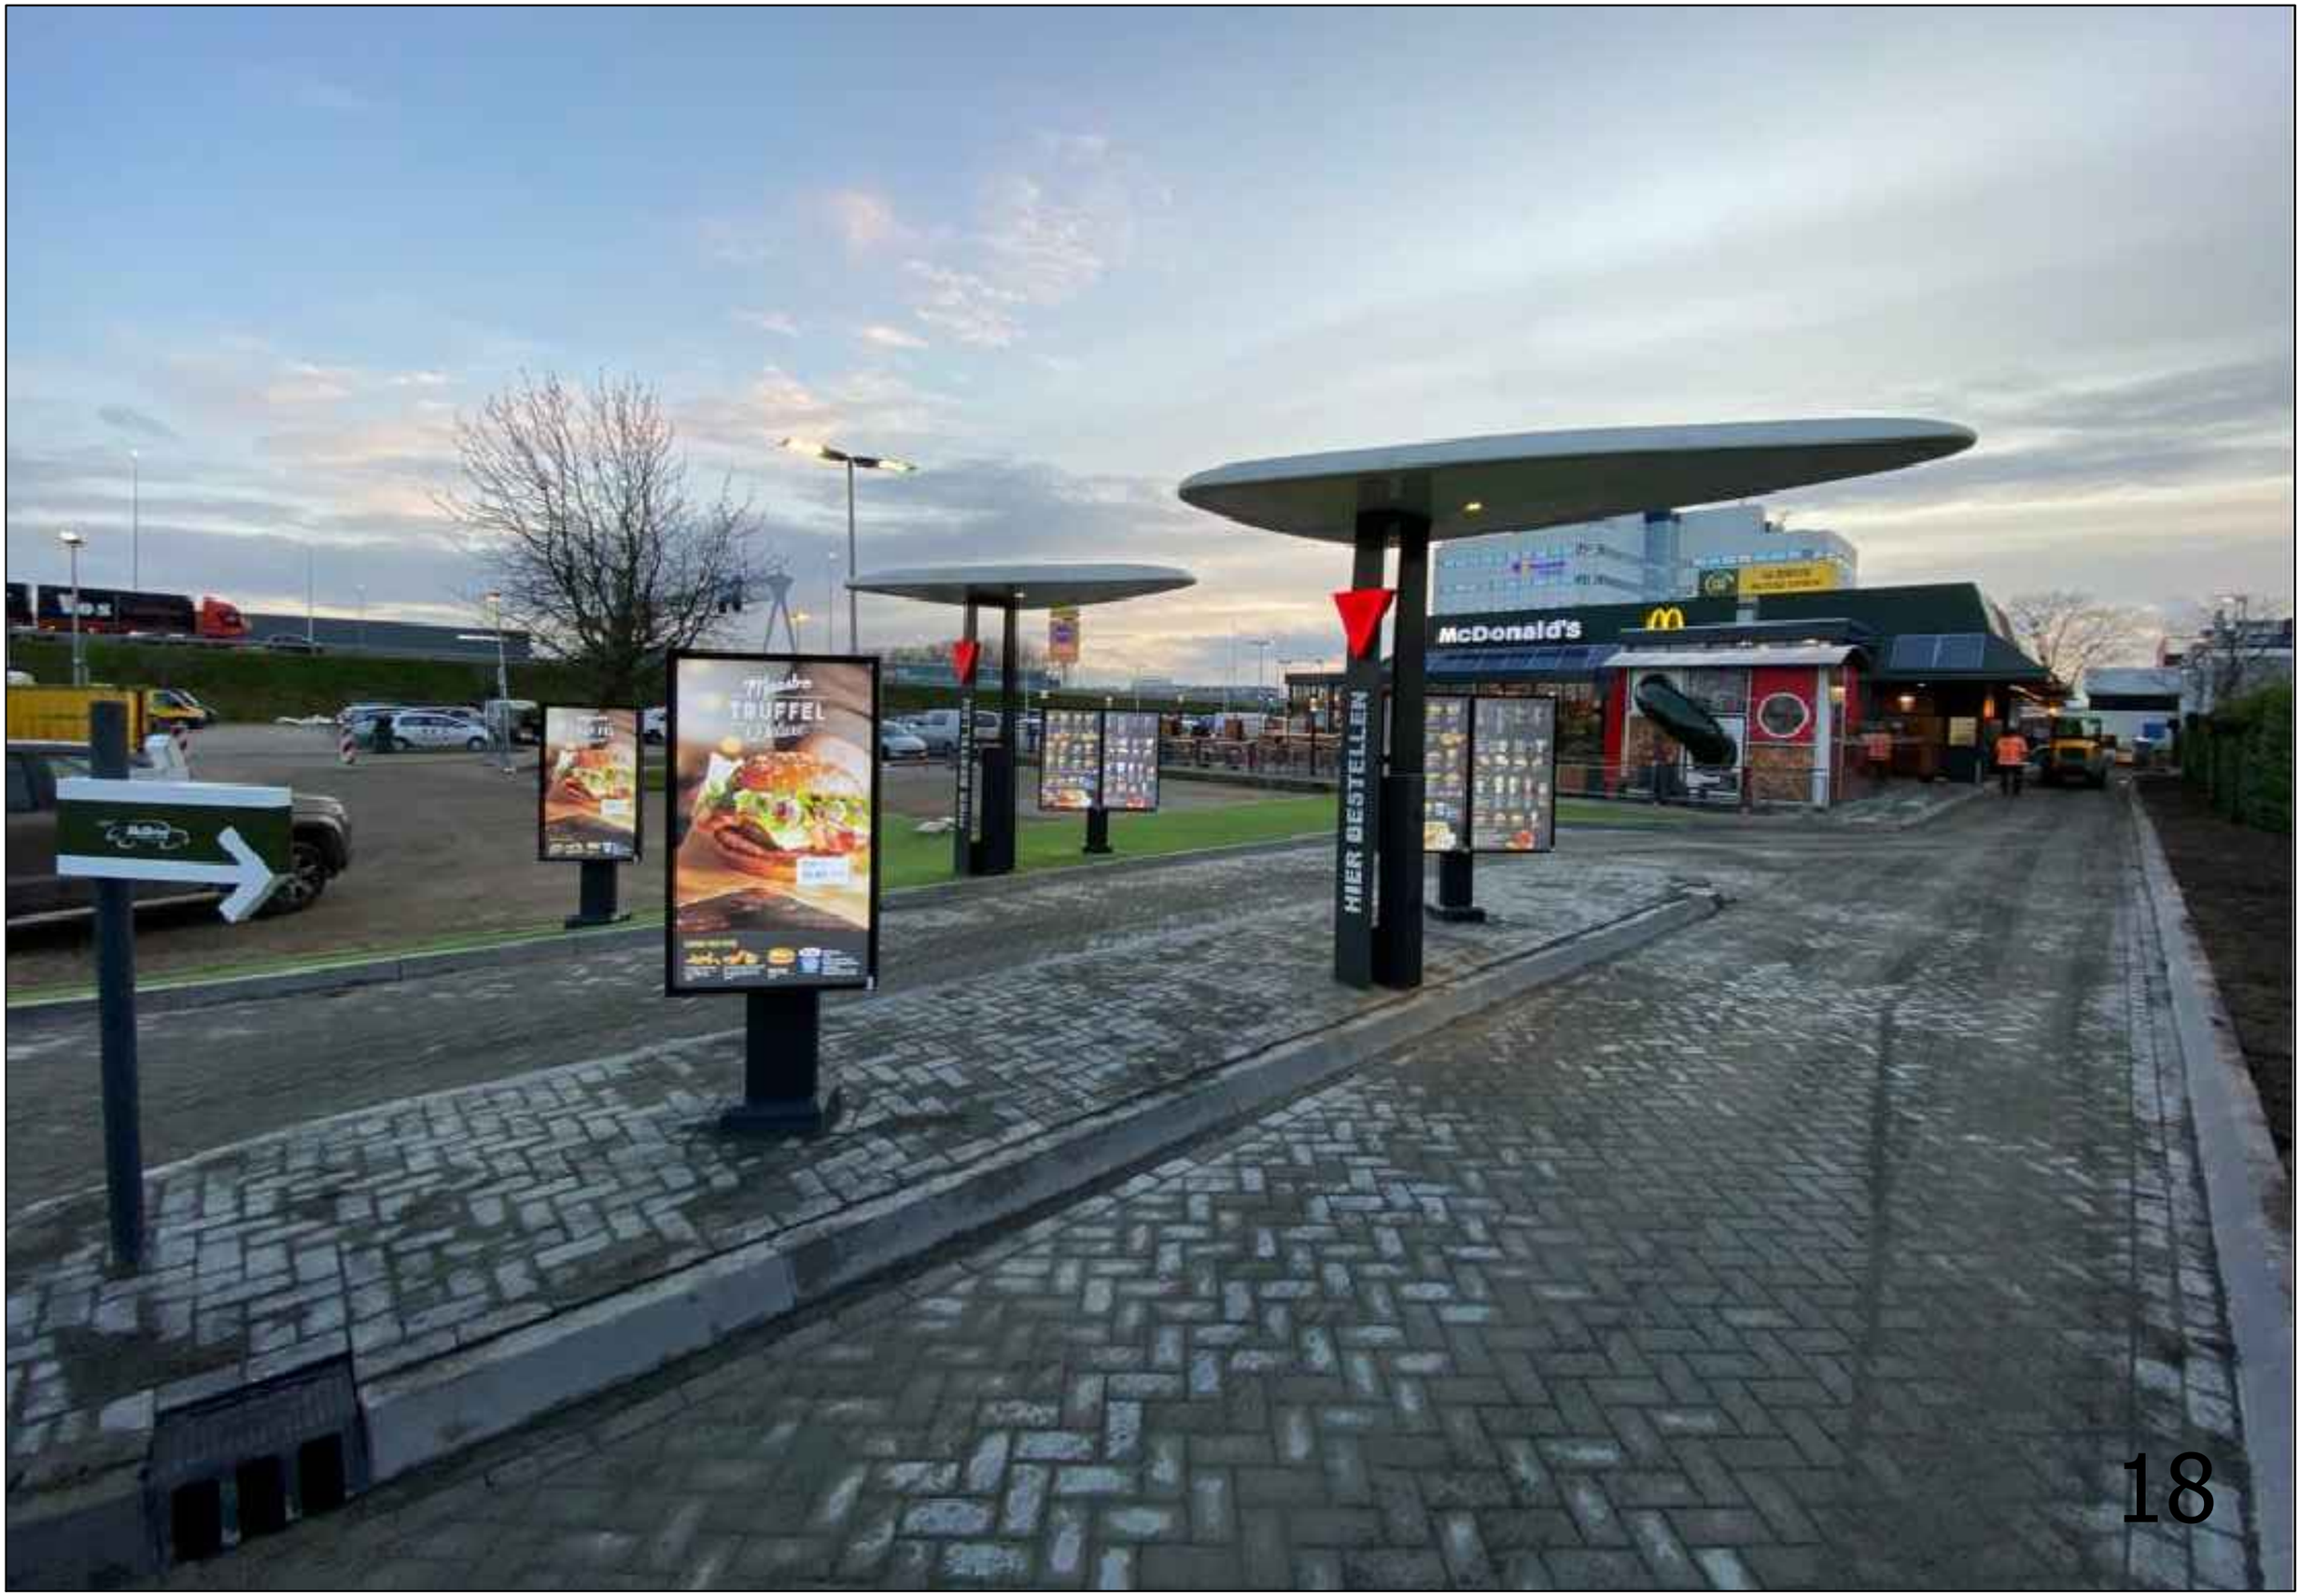

McDonald's
TRUFFEL
HIER BESTELLEN





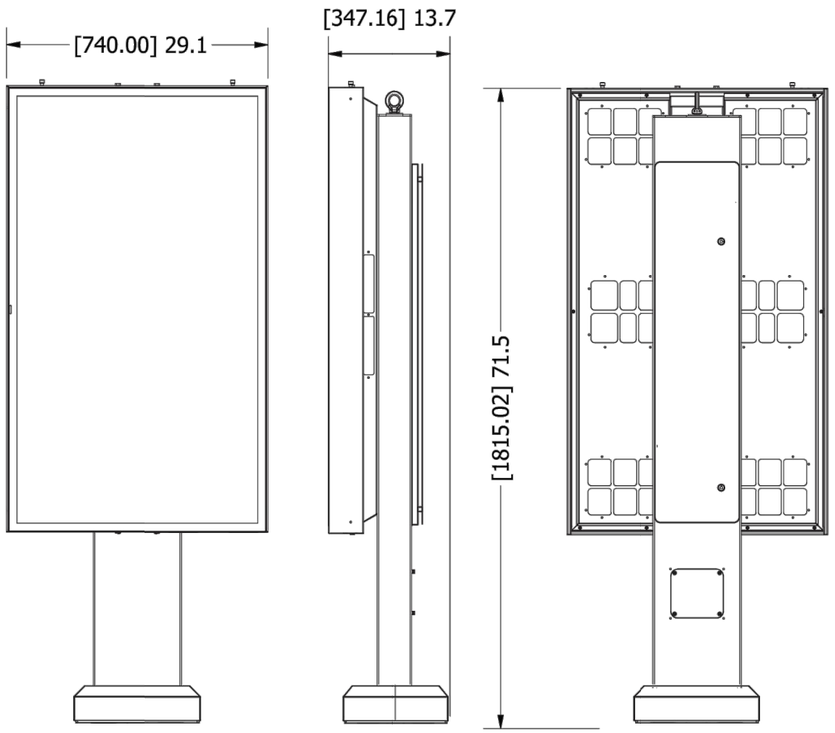

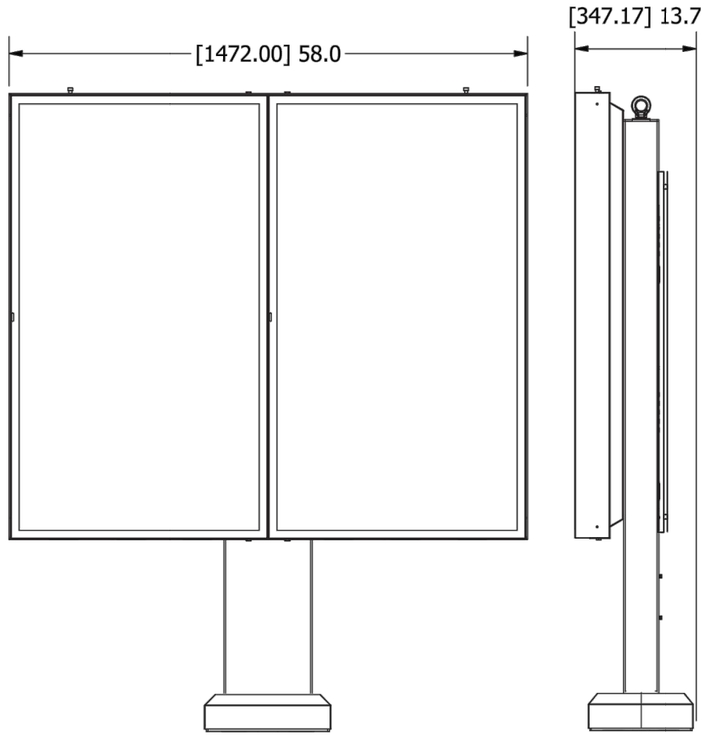

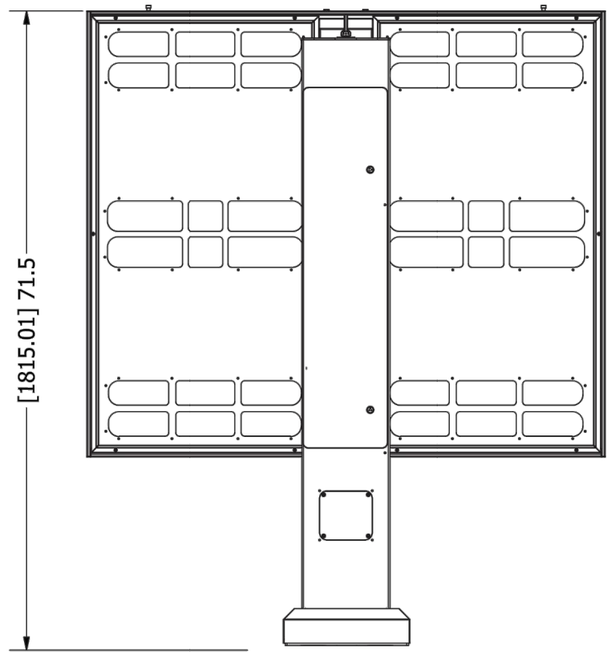

20

coates

Not to be shared with any third party without express written permssion

124-000-001 Trash Bin



Dimensions:
(WxHxD) 1440x 523 x 694 mm

Design:
Galvanized steel-post and foot-plate. Casing and trash bin made of Polyethylen. Waiste container can be emptied after opening the door on the right hand side. Trash has a flap which can be moved with the handle on the left nad side.


Installation:
Free-standing Installation with fixing bolts in existing foundation. Bolts according to DIN norm. When using Fixing Bolts ensure that the concrete has hardened sufficiently in accordance with specified requirements of the Bolt.

Foundation/Fixing Material:
600 x 600 x 250 mm - Concrete C 25/30 / Fixing Bolts


The Sign conforms with the following guidelines:
See product information of the producer.


CE conform according to guidelines:
See product information of the producer.

© by Prolicht 2014

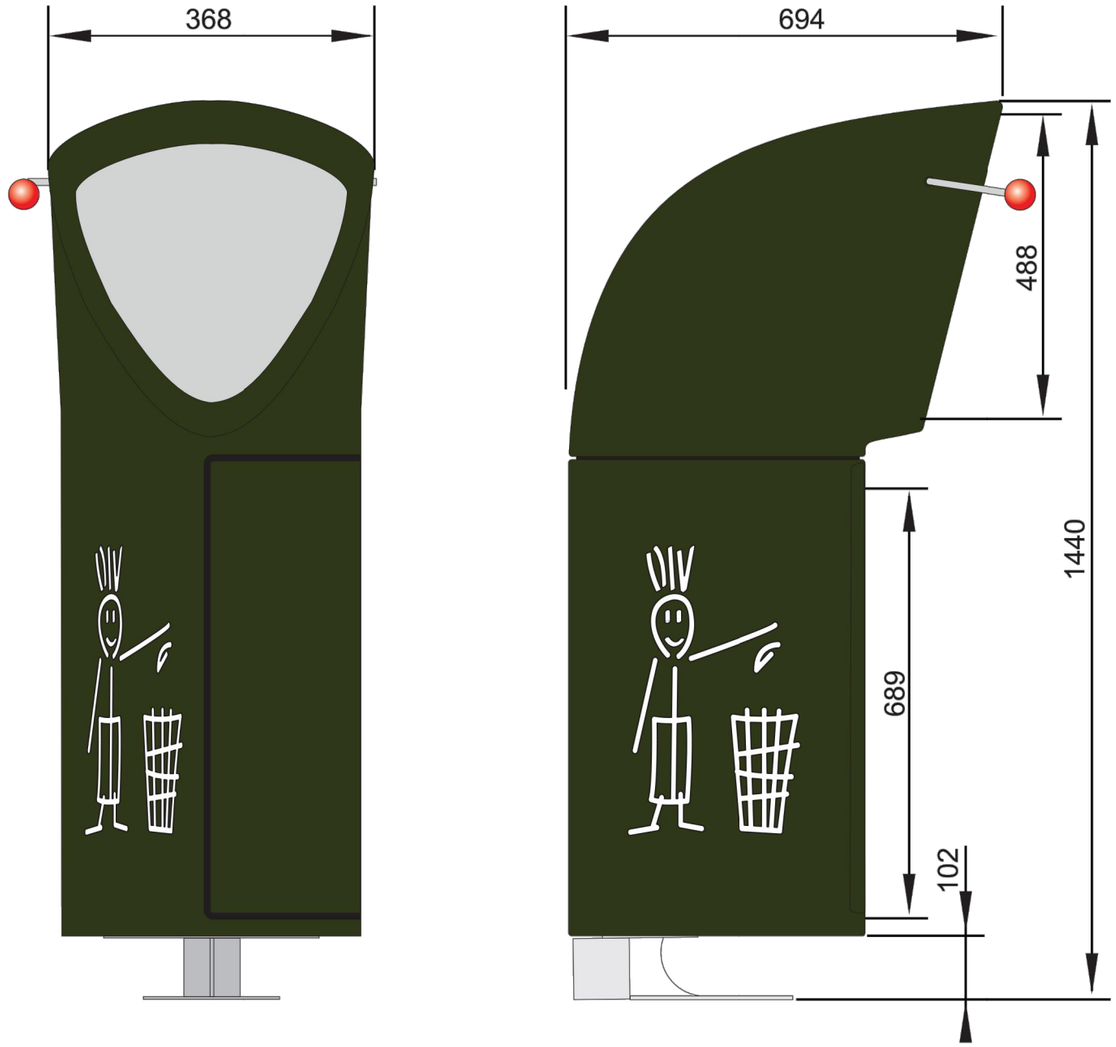


© by Prolicht 2014

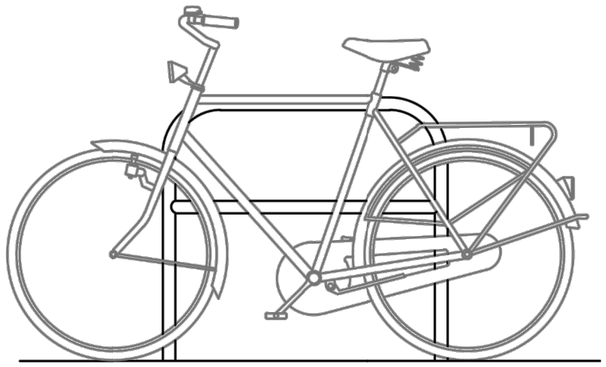





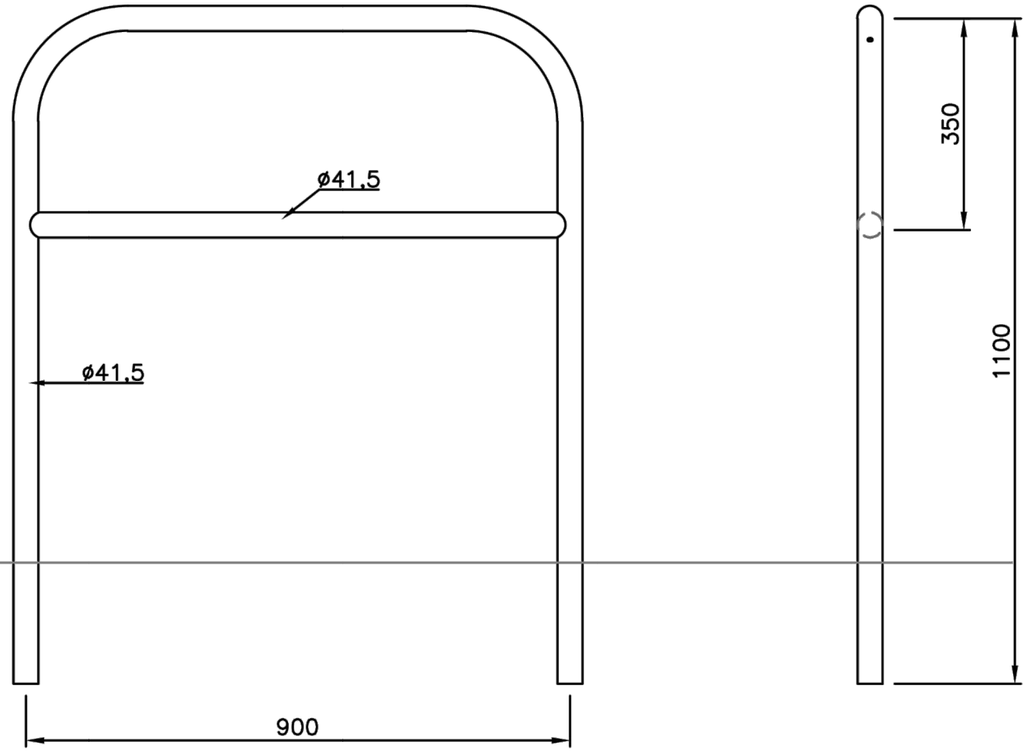

stalen aanleunbeugel met tussenbuis van rond 42mm, breedte 90cm, hoogte 90cm vanaf aangegoten betonvoeten 30x30x30cm

23

FALCO
Postbus 18
NL 7670AA Vriezenveen
tel. 0546-554444
fax. 0546-561115

Wijzigingen	
Datum	door
27-10-11	HZ
–	–
–	–
–	–
–	–
–	–


benaming
Art nr. 02.010.000

opm.
Fietsaanleunbeugel met tussenbuis ø41,5 900x1100

schaal	1:10
formaat	A3
datum	09-11-98
getekend	P.v.U
cc verkoop	ja
extern	ja
tekening nr.	02.010.000 VK

1.80 m fence module

Euroline 3
Ref. PTB03360

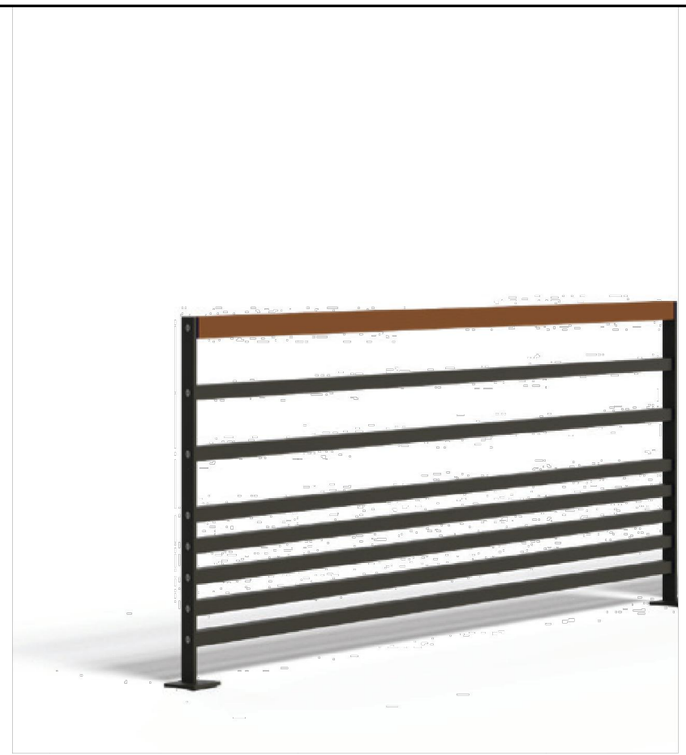


Materials
Anti-corrosion protection steel structure, polyester powder coated finish.
Railing and handrail in aluminium, polyester powder coated. Stainless steel screws.
Comply with guardrails European standards.

Measurements
Fence h x L x l: 1 010 x 1 870 x 60 mm
Weight: 25 kg


Fixation
Final ground level. Must be fixed to the ground on concrete slab.


Colour identity
Feet and railing: RAL 7022
Handrail: RAL 8003



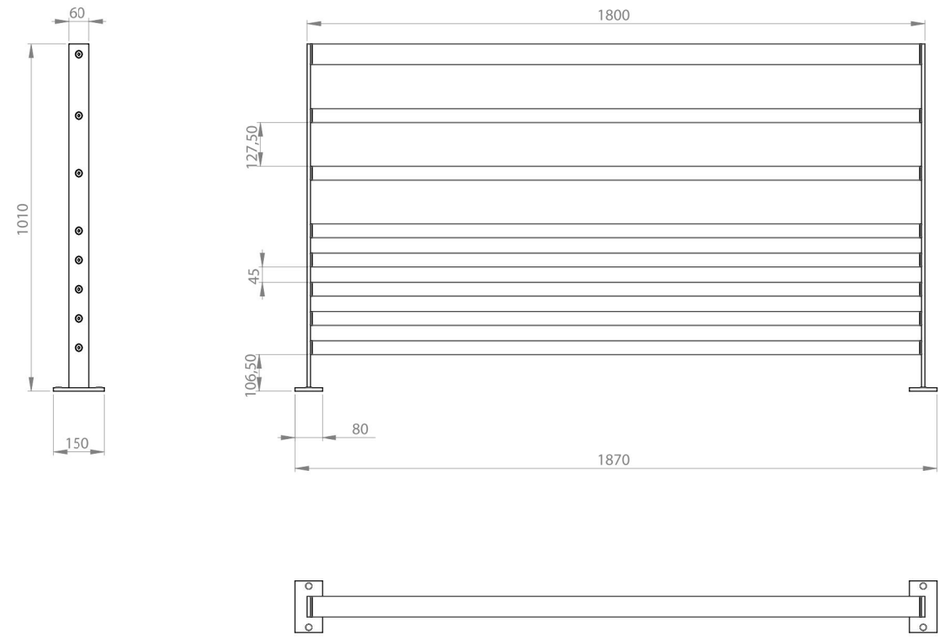

wind screen and lighting

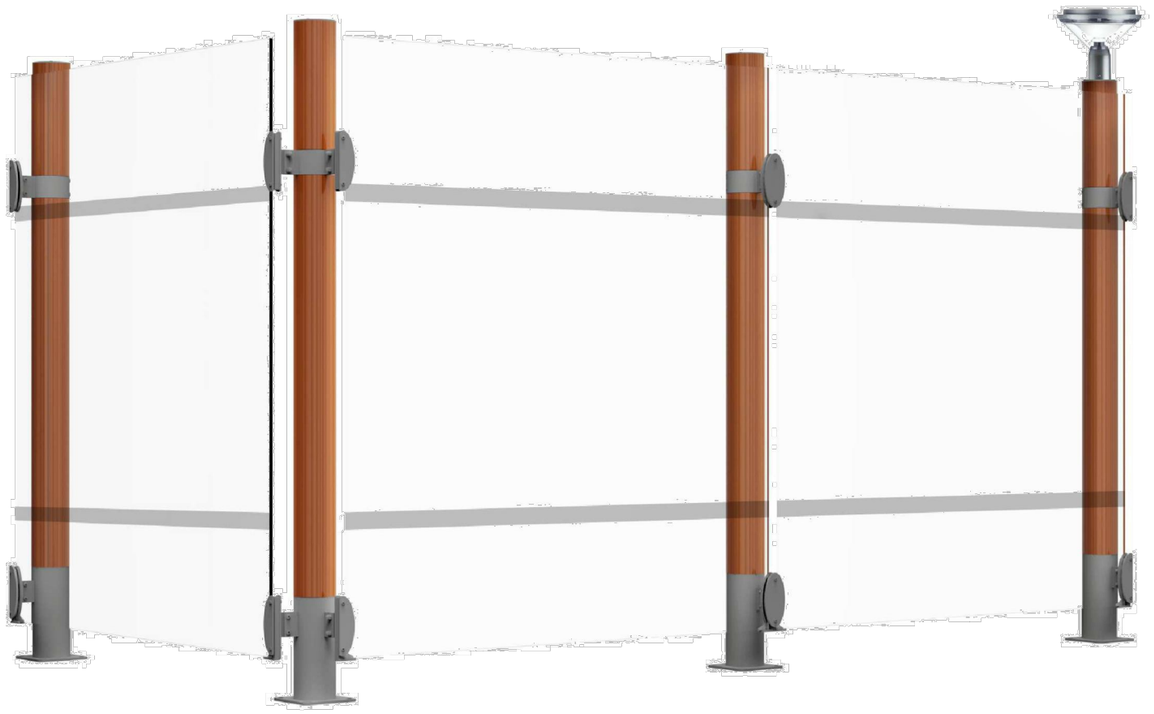

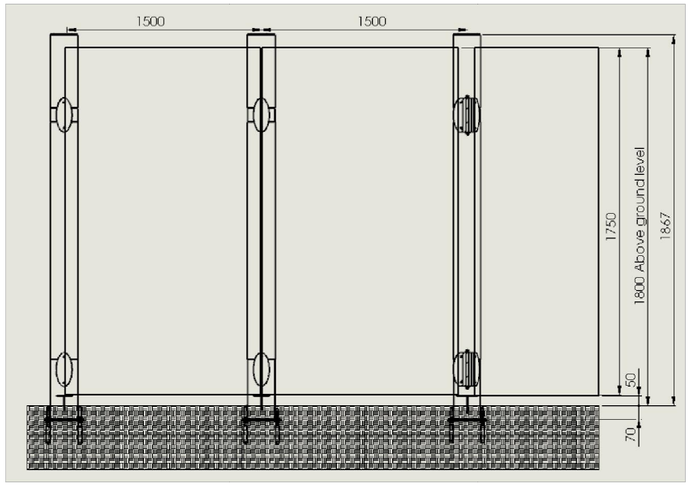

Dimensions in mm

* **Glass element** H:1750mm
with visual guideline stripe

Recommended glass panels :
Stadip 5-5-2 from St Gobain
Height = 1750mm
Width : according to installation

* Lantern can be supplied upon request

General conditions :
* EXW prices - excluding istallation
* Payment at 30 days from date of invoice
* Overdue payment : outstanding interest rate based on legal rate x1,6 prorata temporis

Particular Conditions :
* Product supply only
* Any other demand can be quoted upon request (implementation study, technical visit, implementation…)

PRODUCTS

FENCING



Twilight luminaire



Bega luminaire

WINDSCREEN






MOSHI POLE 5 M

LIGHTING POINT





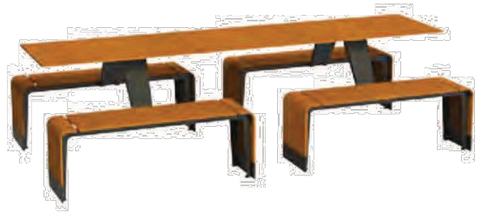









vlaggenmast



straatlantaarn
Moshipaal 5mtr